


12 ft x 14 ft ALUMINUM LOUVER ROOM

Installation and Operating Instructions – YM22012

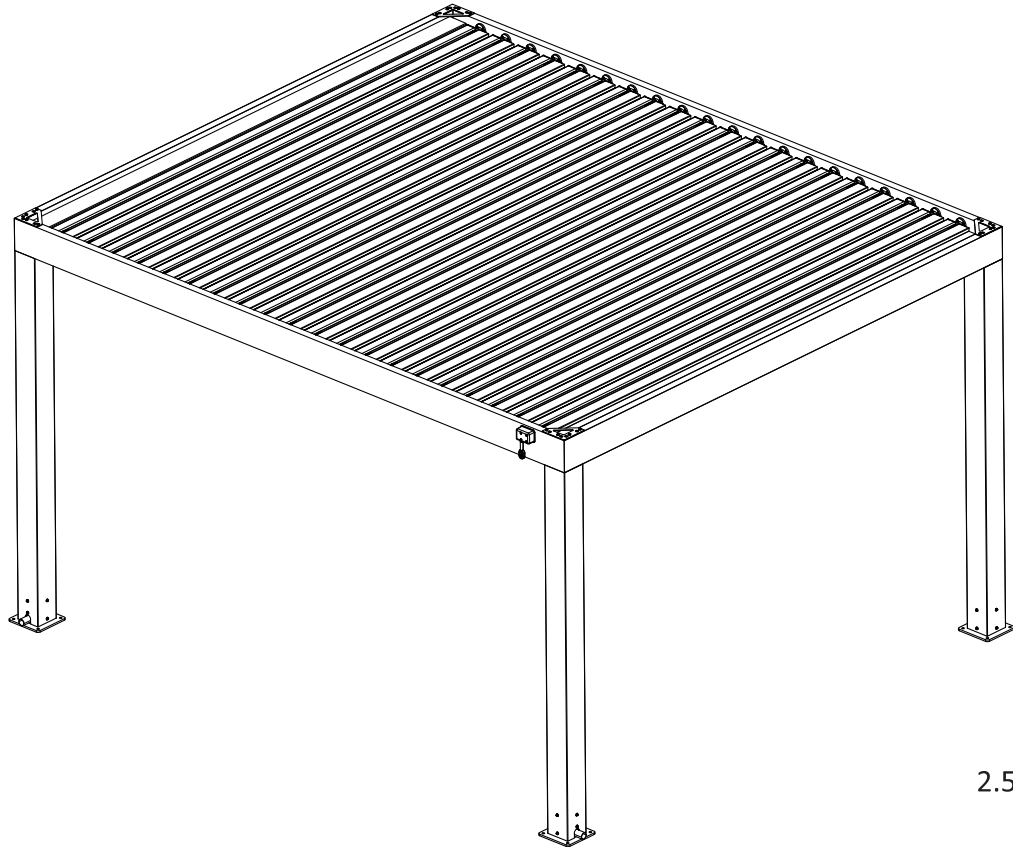


HEIGHT:
2.51m / 8.2 ft

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY
THIS ITEM IS INTENDED FOR OUTDOOR DOMESTIC USE ONLY.
NOT FOR COMMERCIAL USE.

Revised 09-03-2024



Yardistry – North America
Toll Free Customer Support:
1.888.509.4382
Mon - Fri, 8:30 am - 5:00 pm EST
(excl. holidays)
English and French Spoken
For extended hours see our website:
www.yardistrystructures.com
info@yardistrystructures.com
Patents Pending

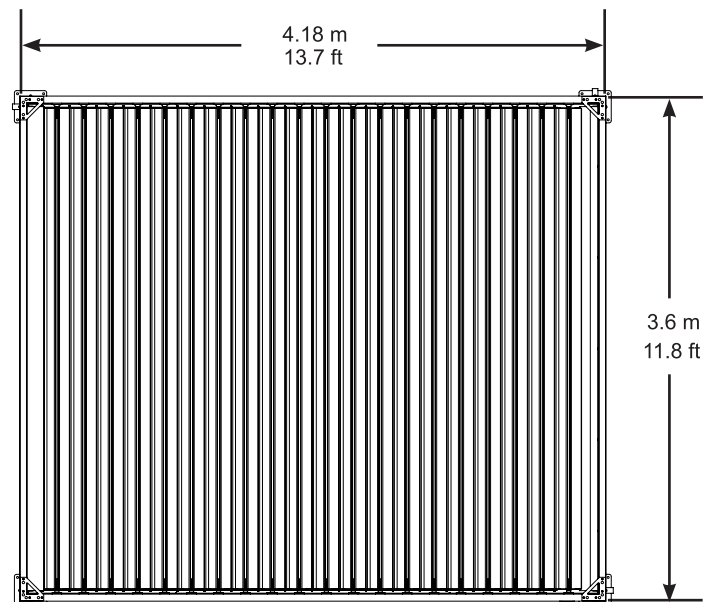

Important Safety Notice!

Yardistry components are intended for privacy, decorative and ornamental use only.

Product is NOT INTENDED for the following:

- A safety barrier to prevent unsupervised access to pools, hot tubs, spas or ponds.
- As load bearing support for a building, structure, heavy objects or swings.
- Used in structures that trap wind, rain or snow that would create extra load on the product.

IMPORTANT! When preparing for high winds and/or winter conditions, turn the louvers to the open position (upright) then attach the Lock Out and Quick Link. This will prevent the structure from blowing over due to high winds and the louvers from breaking due to snow and ice loads. Any accumulated snow must be removed from roof.

Accumulated snow must be removed from roof.

DO NOT climb or walk on roof for any reason.

Permanent structures may require a building permit. As the purchaser and or installer of this product you are advised to consult local planning, zoning and building inspection departments for guidance on applicable building codes and/or zoning requirements.

Wear gloves to avoid injury from possible sharp edges of individual elements before assembly.

During installation, follow all safety warnings provided with your tools and use OSHA approved safety glasses. Some structures may require two or more people to install safely.

Check for underground utilities before digging or driving stakes into the ground!

During assembly it is important to closely follow the instructions. Complete the assembly on a solid, level surface and follow the instructions to square up, level and anchor the structure. This will reduce the gaps at wood connections during assembly.

General Information

General Information: The parts and components are made of aluminum alloy material, and the surface is sprayed. Do not contact with acid, alkali, salt and other corrosive substances; Aluminum alloy shutters should be cleaned with neutral water-soluble detergent, and corrosive chemicals should not be used; The drainage system should be checked regularly to remove blockages and keep clear. The components should be inspected regularly. Please contact us if you require replacement parts.

Questions?

Call toll free or write us at:

1 (888) 509-4382

support@yardistrystructures.com

Regular Hours: Mon - Fri, 8:30 am - 5:00 pm EST
(excl. holidays)

English and French Spoken

(For extended hours see our website)

www.yardistrystructures.com

Patents Pending

Limited Warranty

Yardistry warrants that this product is free from defect in materials and workmanship for a period of one (1) year from the original date of purchase. In addition, for any product with lumber, all lumber is warranted for five (5) years against rot and decay. This warranty applies to the original owner and registrant and is non-transferable.

Regular maintenance is required to assure the integrity of your product and is a requirement of the warranty. This warranty does not cover any inspection costs.

This Limited Warranty does not cover:

- Labor for replacement of any defective item(s);
- Incidental or consequential damages;
- Cosmetic defects which do not affect performance or integrity;
- Vandalism; improper use or installation; acts of nature, including but not limited to wind, storms, hail, floods, excessive water exposure;
- Minor twisting, warping, checking or any other natural occurring properties of wood that do not affect performance or integrity.

Yardistry products have been designed for safety and quality. Any modifications made to the original product could damage the structural integrity of the product leading to failure and possible injury. Yardistry cannot assume any responsibility for modified products. Furthermore, modification voids any and all warranties.

This product is warranted for RESIDENTIAL USE ONLY. Yardistry disclaims all other representations and warranties of any kind, express or implied.

This Warranty gives you specific legal rights. You may have other rights as well which vary from state to state or province to province. This warranty excludes all consequential damages, however, some states/provinces do not allow the limitation or exclusion of consequential damages, and therefore this limitation may not apply to you.

AUSTRALIA: Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Instructions for Proper Maintenance

Your Yardistry structure is designed and constructed of quality materials. As with all outdoor products it will weather and wear. To maximize the enjoyment, safety and life of your structure it is important that you, the owner, properly maintain it.

HARDWARE:

- Check metal parts for rust. If found, sand and repaint using a non-lead paint complying with 16 CFR 1303.
- Inspect and tighten all hardware after completion of assembly; after first month of use; and then annually. Do not over-tighten as to cause crushing and splintering of wood.
- Check for sharp edges or protruding screw threads, add washers if required.

Assembly Guides

Tools Required: (not included)

- | | | |
|------------------------------|------------------|----------------------|
| • Tape Measure | • Safety Glasses | • 6' Step Ladder x 3 |
| • Carpenters Level | • Hard Hat | • Square |
| • Standard or Cordless Drill | • Adult Helper | • Ratchet |
| • Rubber Hammer | • Safety Gloves | • Knife |

Symbols:

Throughout these instructions symbols are provided in the top, right-hand corner of the page.



- Use Help, where this is shown, 2, 3 or 4 people are required to safely complete this step. To avoid injury or damage to the assembly make sure to get some help.



- Check that the assembly is square before tightening the bolts.



- Use a measuring tape to assure proper location

If you dispose of your Yardistry structure: Please disassemble and dispose of your unit so that it does not create any unreasonable hazards at the time it is discarded. Be sure to follow your local waste ordinances.

Assembly Tips

Following are some helpful tips to make the assembly process smooth and efficient.

PRE-ASSEMBLIES:

- Work on a raised, solid and flat surface such as a table or saw horse.
- Keep all connections flush where shown in the instructions.
- When assembling the beams keep parts flat, straight and snug when connecting.

METAL PARTS:

- Louvered material may have sharp edges, wear safety gloves.
- Place louvered material on a non-abrasive surface before and after assembly as it can bend, dent and scratch easily.
- Remove each piece from its packaging material directly before installing
- Turn the louvers to the open position (upright) then attach the Lock Out and Quick Link (Page 32). This will prevent the structure from being blown over due to high winds and the louvers from breaking due to snow and ice loads.
- Any accumulated snow must be removed from roof.

WINTER AND HIGH WIND PREPARATION:

- Turn the louvers to the open position (upright) then attach the Lock Out and Quick Link. This will prevent the structure from being blown over due to high winds and the louvers from breaking due to snow and ice loads.
- Any accumulated snow must be removed from roof.

Sealant Application Tips, Warning and First Aid Information

SEALANT:

- All surfaces to be clean, dry, dust and grease free before application with temperatures above 5°C (41°F), no warmer than 35°C (95°F).
- Remove cap and cut a small piece off the nozzle for a small bead.
- Apply sealant in small beads and smooth as required.
- To smooth sealant into the joint use a glove covered finger, putty knife, etc. Smooth sealant to create a continuous water-tight seal, diverting water into the gutter with an unimpeded flow into the gutter drain corner.
- Clean excess with a cloth or paper towel before it skins over.
- An initial bond will set in approximately 20 minutes and fully set in 24 hours.

WARNING:

- CAUSES SERIOUS EYE AND SKIN IRRITATION. Always wear safety glasses and rubber gloves when using product.
- KEEP OUT OF REACH OF CHILDREN.
- Prolonged or repeated exposure MAY CAUSE ORGAN DAMAGE. Provide ample ventilation.

FIRST AID:

- If ingested, DO NOT INDUCE VOMITING. Seek immediate medical attention.
- Eye contact: immediately flush eyes with water for at least 15 minutes. Remove contact lenses if present.
- Skin contact; wash thoroughly with soap and water. If eye/skin irritation persists or respiratory symptoms occur or develop, seek medical attention.

Use of this product can expose you to chemicals including Methanol, which is known to the State of California to cause birth defects and other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Dispose of contents and container in accordance with local regulations.

Permanent Installation Examples

Note: It is critically important you start with square, solid and level footings, concrete pad or deck to attach your Pergola Room.

We supply Post Bases with this structure which gives you the flexibility to permanently install your structure to a pre-existing or new wood or concrete surface.


- The hardware to attach the Post Base to the structure is included.
- The hardware to mount the structure permanently will need to be purchased separately at your local hardware store.

If you are mounting to concrete footers see below for the correct locations and placement. Please double check for possibility of any underground utilities such as gas, telephone, cable or sprinkler lines.

Following are some examples of how to mount the structure to wood or concrete surfaces.


Refer to your local building and city codes, ordinances, neighborhood covenants, or height restrictions regarding this type of structure for guidance on acceptable installation requirements.

Concrete Footer


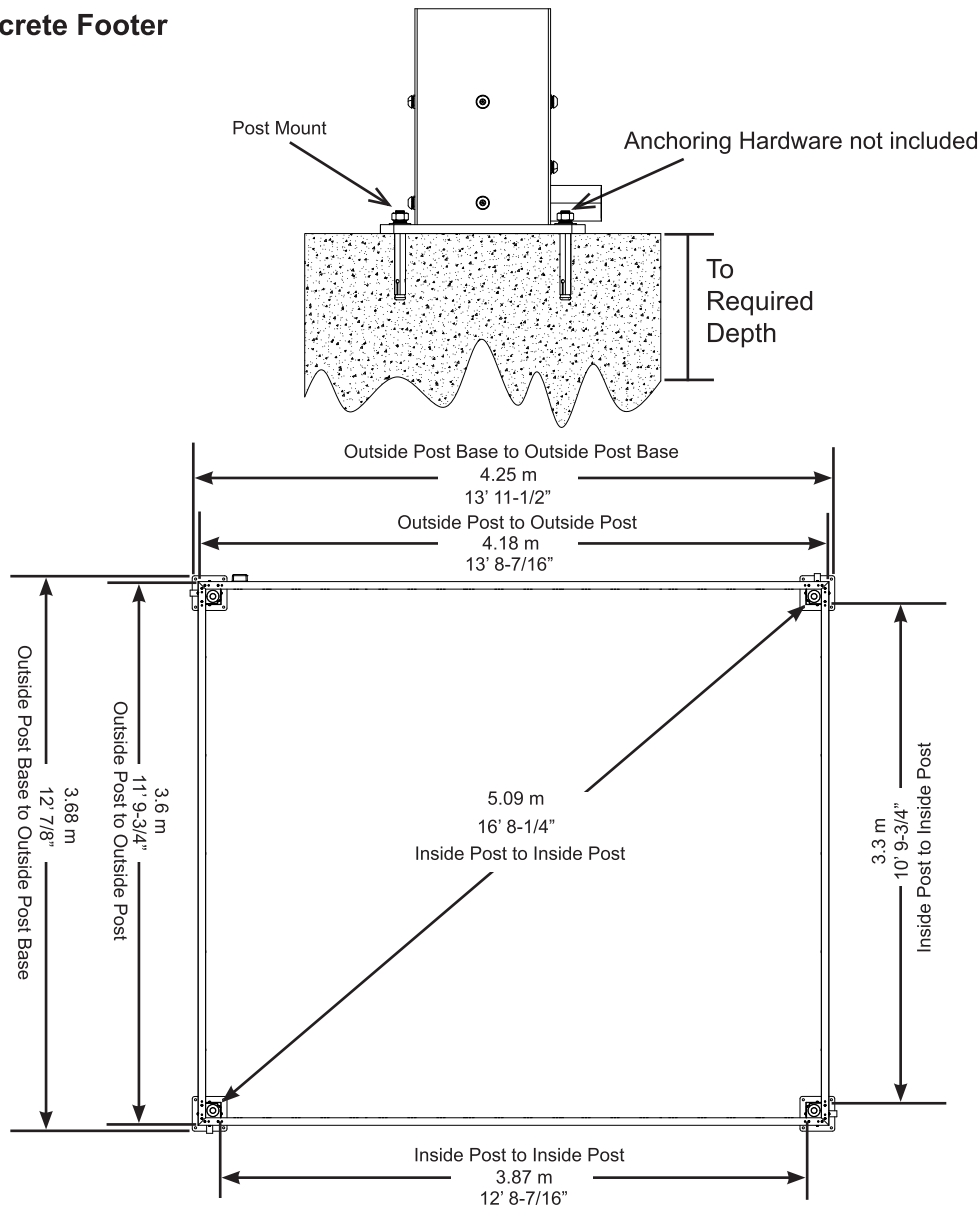


Permanent Installation Examples cont.

Concrete Patio [min. 4.41 m x 3.83 m (14'5-1/2" x 12'6-3/4")] with 15.24 cm (6") clearance on all sides

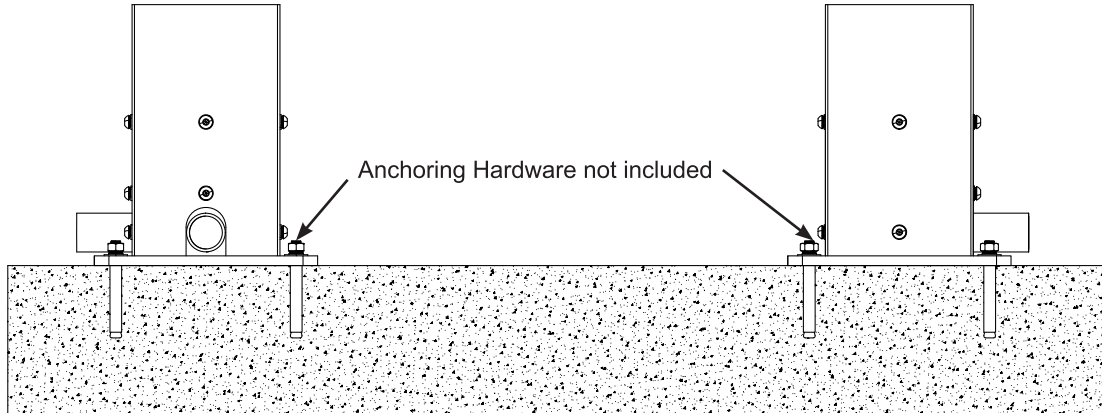


Wood Deck [min. 4.41 m x 3.83 m (14'5-1/2" x 12'6-3/4")] with 15.24 cm (6") clearance on all sides

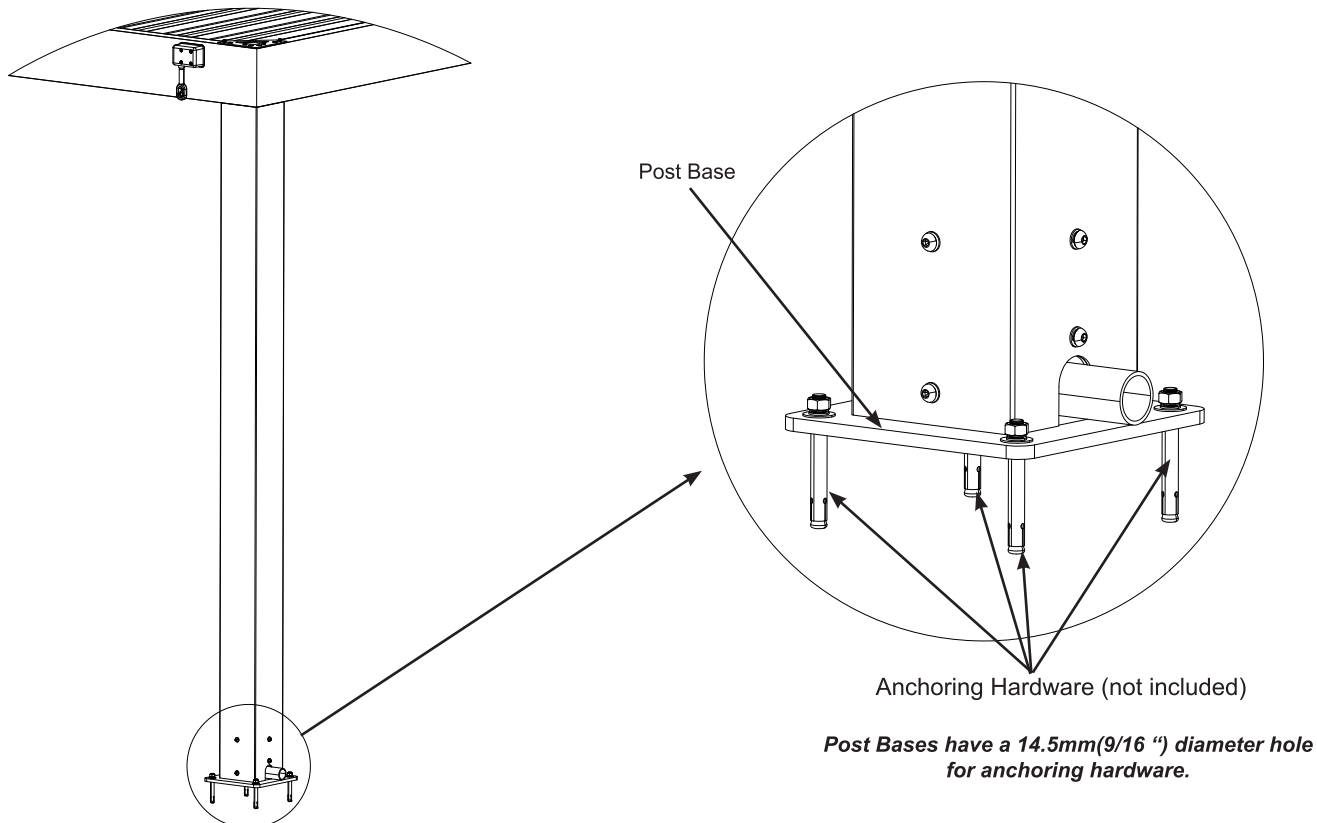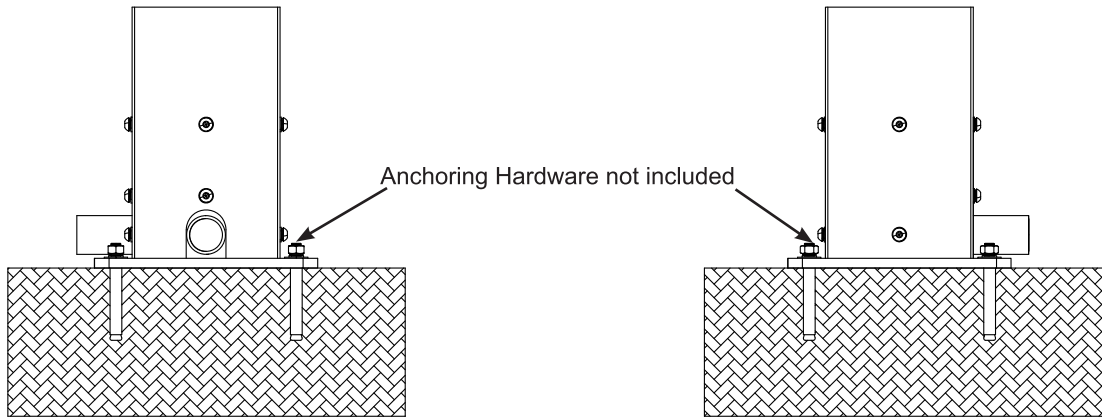


Part Identification

(Dimensions are approximate and are shown to assist in the identification of parts for assembly. Actual dimensions may be smaller or larger.

1pc. A Long Beam Assembly (4176mm) (164-7/16")

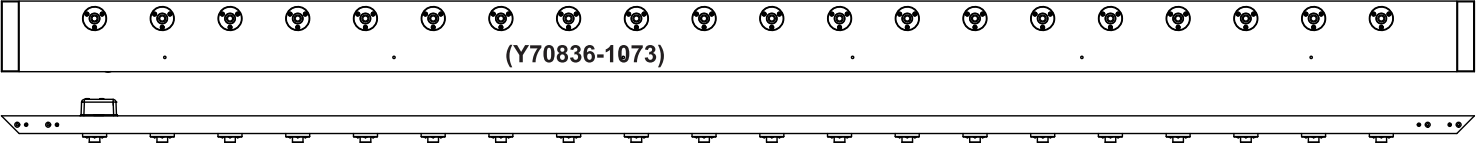


1pc. B Long Beam Assembly (4176mm) (164-7/16")

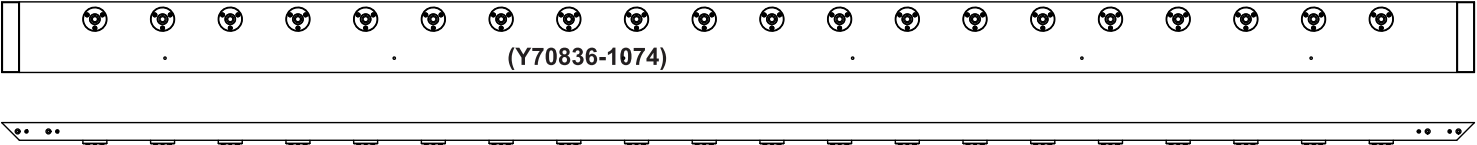


1pc. Beam C (3600mm) (141-3/4")




1pc. Beam D (3600mm) (141-3/4")

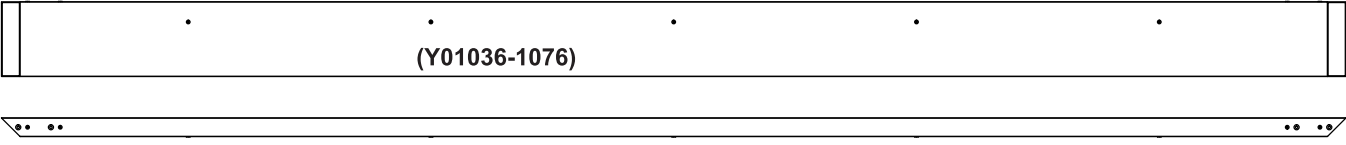


4pc. Post Assembly (2295mm) (90-1/8")

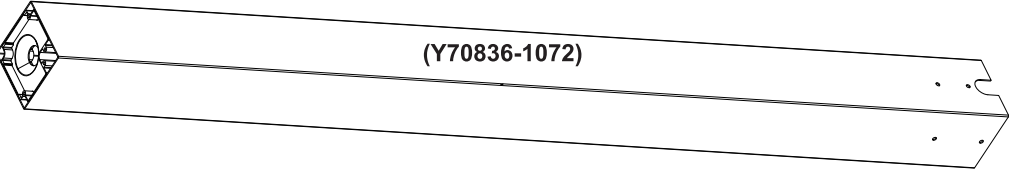


1pc. A Louver Assembly (3425mm) (134-13/16")

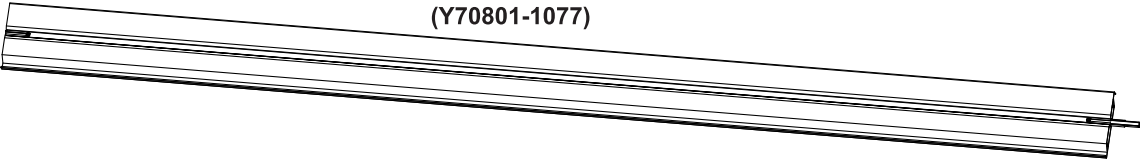

16pc. B Louver Assembly (3425mm) (134-13/16")

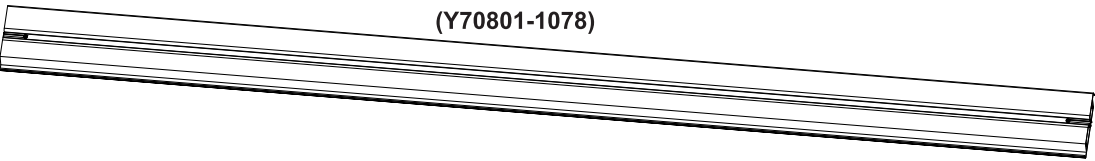


1pc. Side Gutter Assembly (4064mm) (160") (2pk)

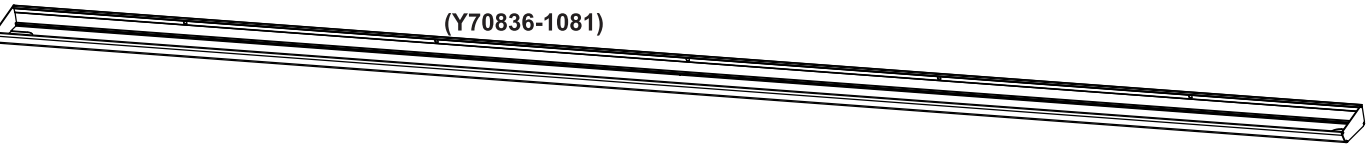

Part Identification


(Dimensions are approximate and are shown to assist in the identification of parts)
for assembly. Actual dimensions may be smaller or larger.

1pc. Front Gutter (3450mm) (135-13/16")

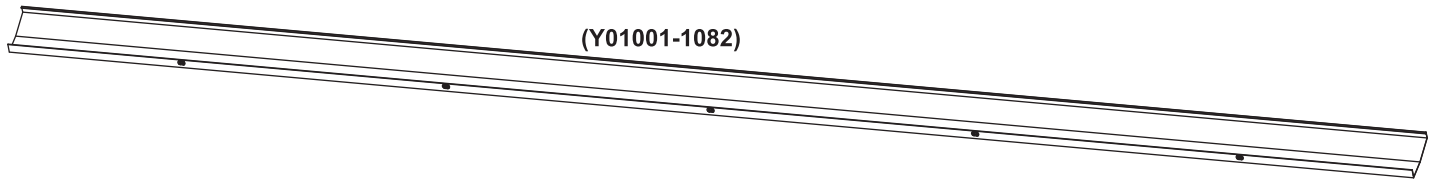


(Y01001-1082)

1pc. Back Gutter (3450mm) (135-13/16")

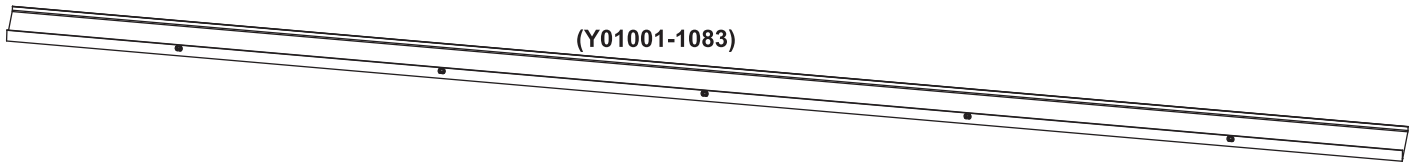


(Y01001-1083)

1pc. Long Louver Link (2pk)

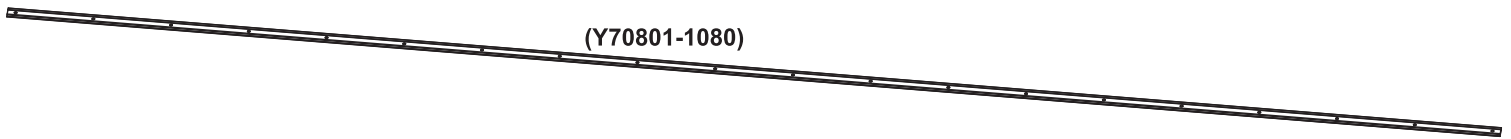


(Y70801-1080)


4pc. Post Base
(Y01036-1007)




1pc. Corner Connector (4pk)
(Y70890-1012)




1pc. Long Louver End Plate (40pk)
(Y70890-1079)

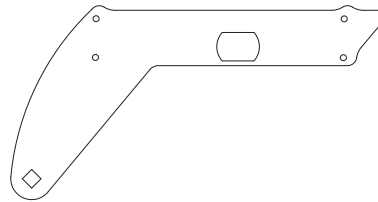


1pc. Crank Handle
(Y01001-1022)




1pc. Downspout Short (4pk)
(Y70818-1025)




1pc. Triangle Plate (4pk)
(Y70836-1013)




1pc. Sealant Tube
(Y90100-001)



1pc. Lock Out
(Y00436-329)



1pc. Quick Link
(Y01190-336)




1pc. Gazebo ID Plaque
(Y70800-104)




Hardware Identification (Dimensions are approximate and are shown to assist in the identification of parts) for assembly. Actual dimensions may be smaller or larger.


32pc. Bolt M8x14mm, Inner hexagonal semi-circular head - (Y17492-003)




32pc. Spring Washer M8 - (Y15392-004)




32pc. Flat Washer M8 - (Y15192-005)




38pc. Inner hexagon bolts M5x15mm - (Y17692-008)




38pc. Flat Washer M5 - (Y15192-009)




40pc. Carriage bolt M6x16mm - (Y17492-011)




40pc. Nut M6 - (Y18392-018)




16pc. Plastic Cap - (Y61836-1070)




160pc. Screw ST2.6x10mm, Cross half round head - (Y16492-010)




1pc. PH1 Phillips Screwdriver Bit - (Y10400-012)



1pc. H5 x 50mm Hex Bit - (Y10400-013)




1pc. 10mm Ratcheting Combination Wrench - (Y10400-015)

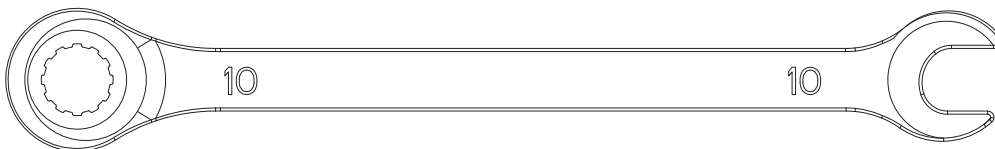


1pc. H4 x 150mm Hex Bit - (Y10400-014)




16pc. Inner hexagon bolts M6x200mm - (Y17692-007)



2pc. M4X20 self-drilling screws - (Y16492-019)

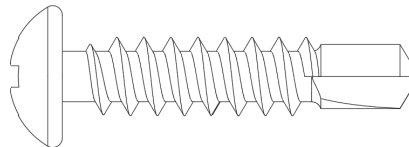

Step 1: Inventory Parts - Read This Before Starting Assembly



- A.** This is the time for you to inventory all your components and hardware, referencing the parts identification sheets. This will assist you with your assembly.
- Each step indicates which bolts and/or screws you will need for assembly, as well as any flat washers, lock washers and lock nuts.
- B.** If there are any missing or damaged pieces or you need assistance with assembly please contact the consumer relations department directly. Call us before going back to the store.

1-888-509-4382

Regular Hours: Mon - Fri, 8:30 am - 5:00 pm EST (excl. holidays)
English and French Spoken

support@yardistrystructures.com

- C.** Read the assembly manual completely, paying special attention to ANSI warnings; notes; and safety/maintenance information on pages 1 - 6.
- Follow the instructions in order.
 - This structure is designed to be assembled and installed ideally by four people, DO NOT attempt to install alone.
 - Consider the slope of elevation where you plan to install the structure. Also, check for gas, telephone, other utilities or sprinkler line locations prior to excavating any holes.
- D.** Before you discard your cartons fill out the form below.
- The carton I.D. stamp is located on the end of each carton.
 - Please retain this information for future reference. You will need this information if you contact the Consumer Relations Department.


PRODUCT NUMBER: YM22012

CARTON I.D. STAMP: __ __ __ __ __ 14459 __ (Box 1)


Step 2: Post Base Installation Part 1




F2.1

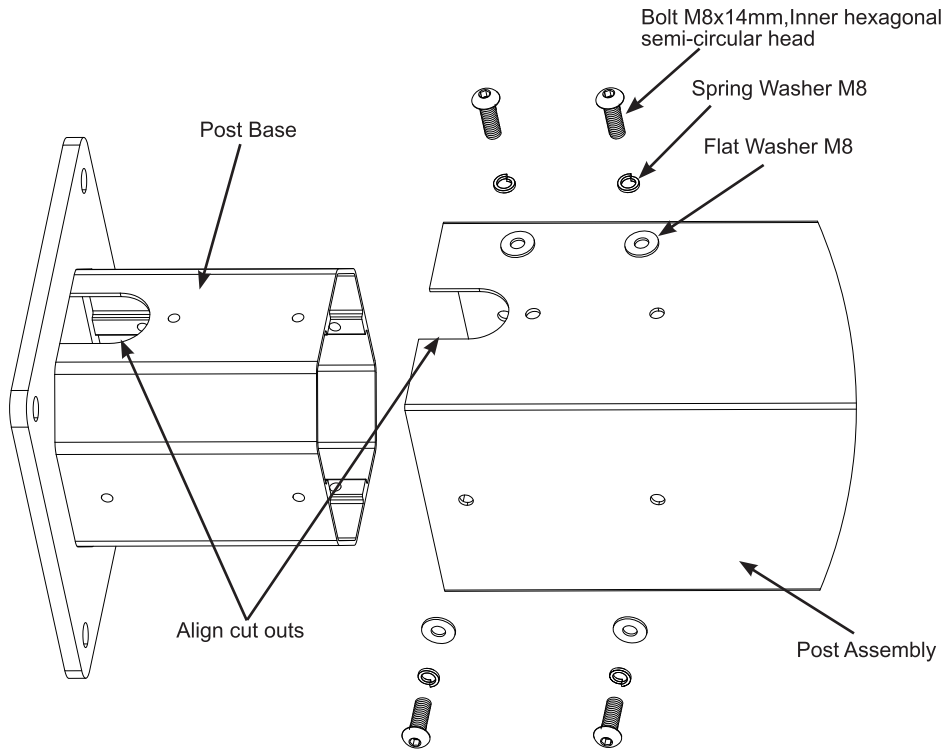

F2.3

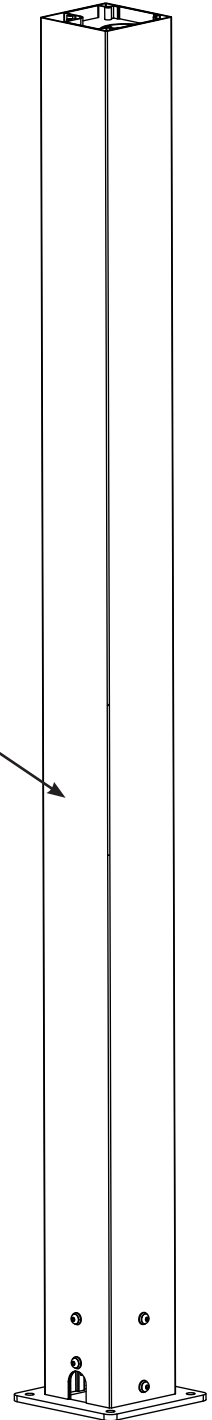

F2.2

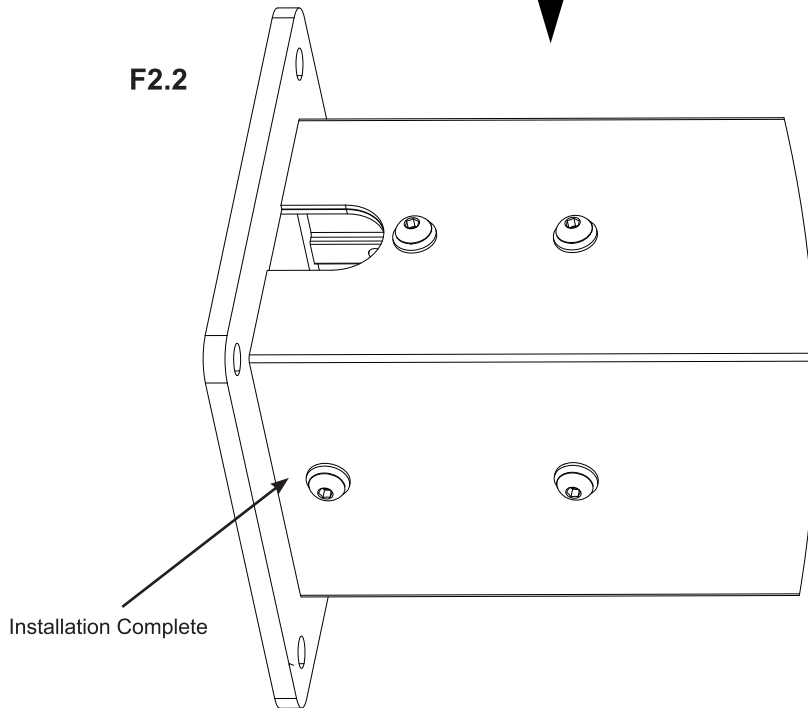

Components

4 x Post Assembly
4 x Post Base


Hardware

32 x Bolt M8x14mm, Inner hexagonal semi-circular head
32 x Flat Washer M8
32 x Spring Washer M8


Step 2: Post Base Installation Part 2



F2.4

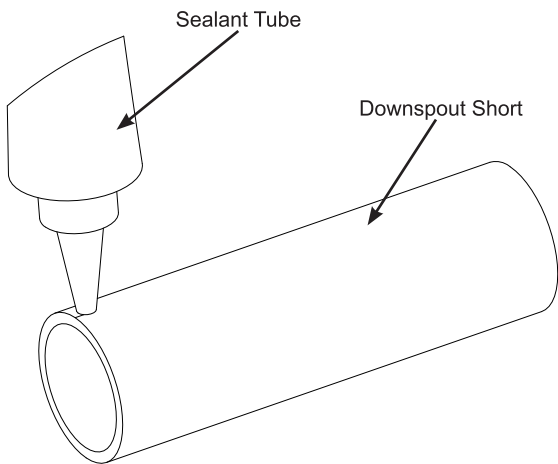


F2.5

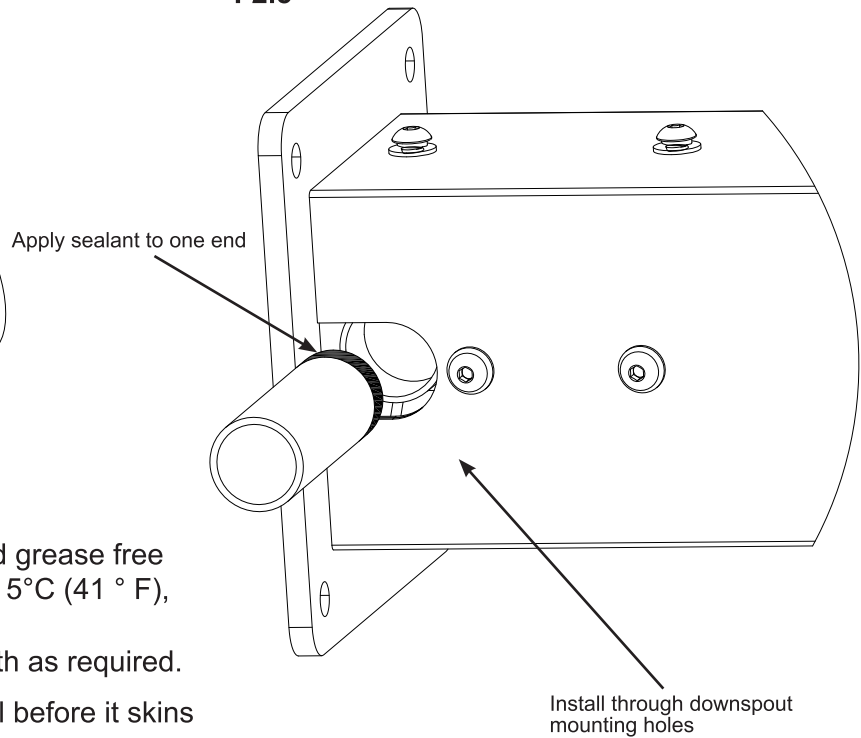


Note: All surfaces to be clean, dry, dust and grease free before application with temperatures above 5°C (41 ° F), no warmer than 35°C (95° F).

- Apply sealant in small beads and smooth as required.
- Clean excess with a cloth or paper towel before it skins over.
- Always wear safety glasses and rubber gloves when using product.

F2.7

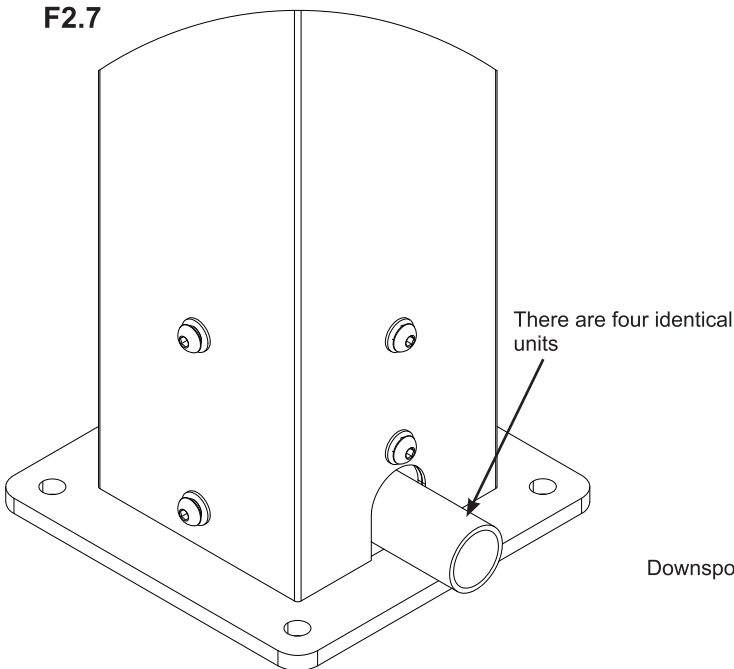

F2.6

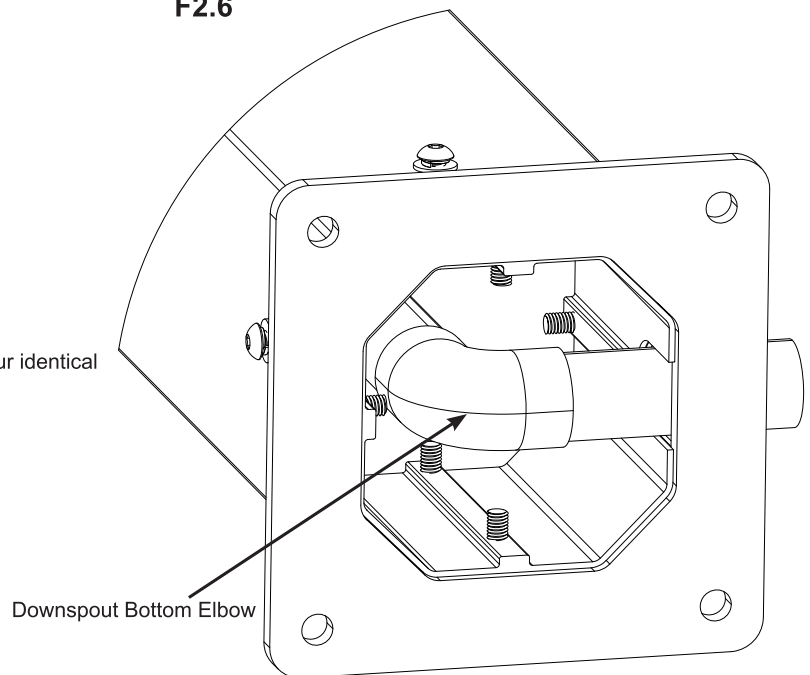


Components

- 4 x Downspout Short
- 1 x Sealant Tube




Step 3: Post Placement

When the post assembly is placed, the bottom downspout faces outward, the position of the thread mounting hole is near the outside, Top drain on the inside,as shown in the following figure. (F3.1)

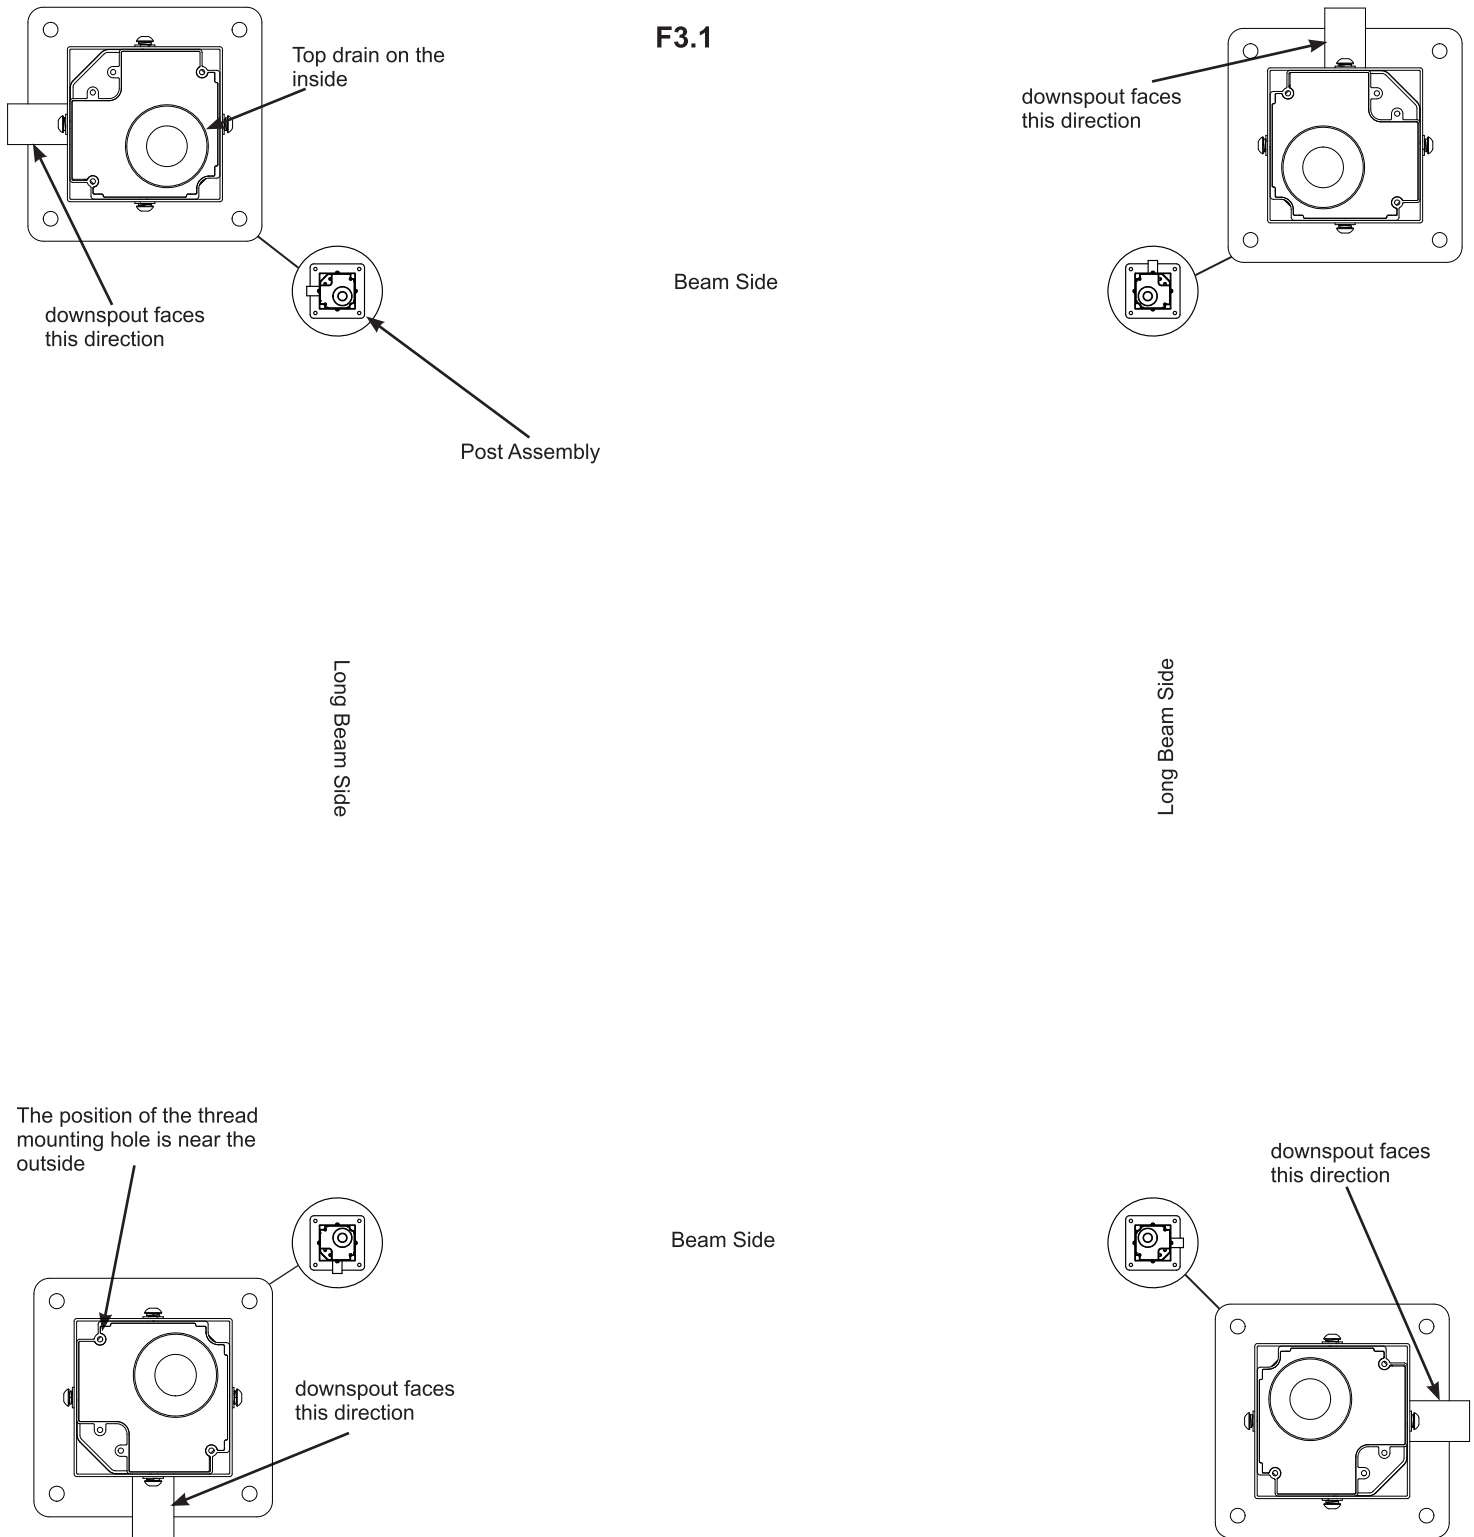

Step 4: A Long Beam Assembly Installation

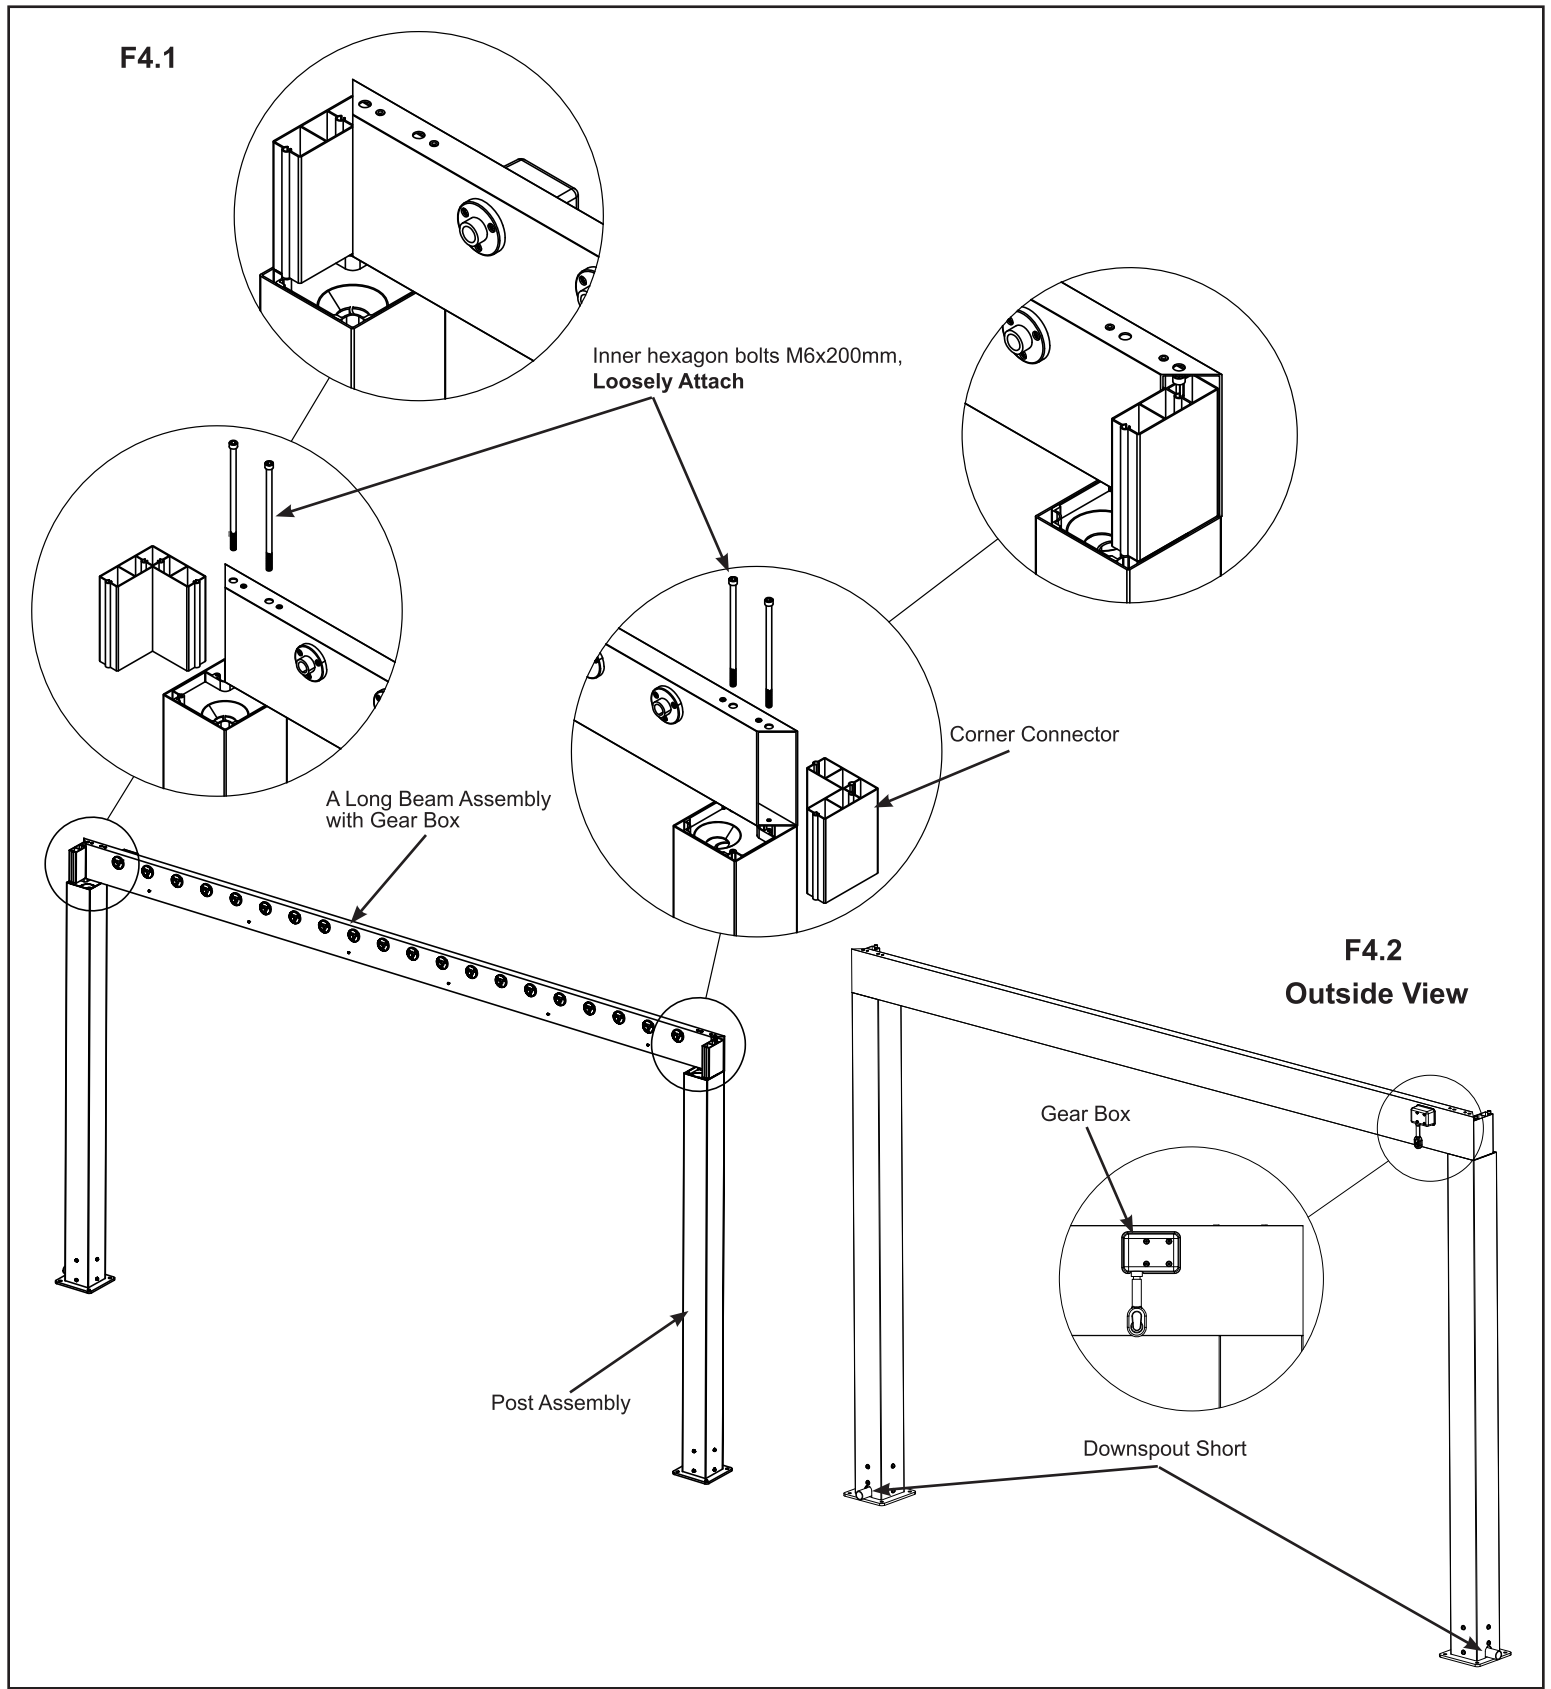


Components

1 x A Long beam assembly
2 x Corner Connector

Hardware

4 x Inner hexagon bolts M6x200mm

Step 5: Beam C Installation

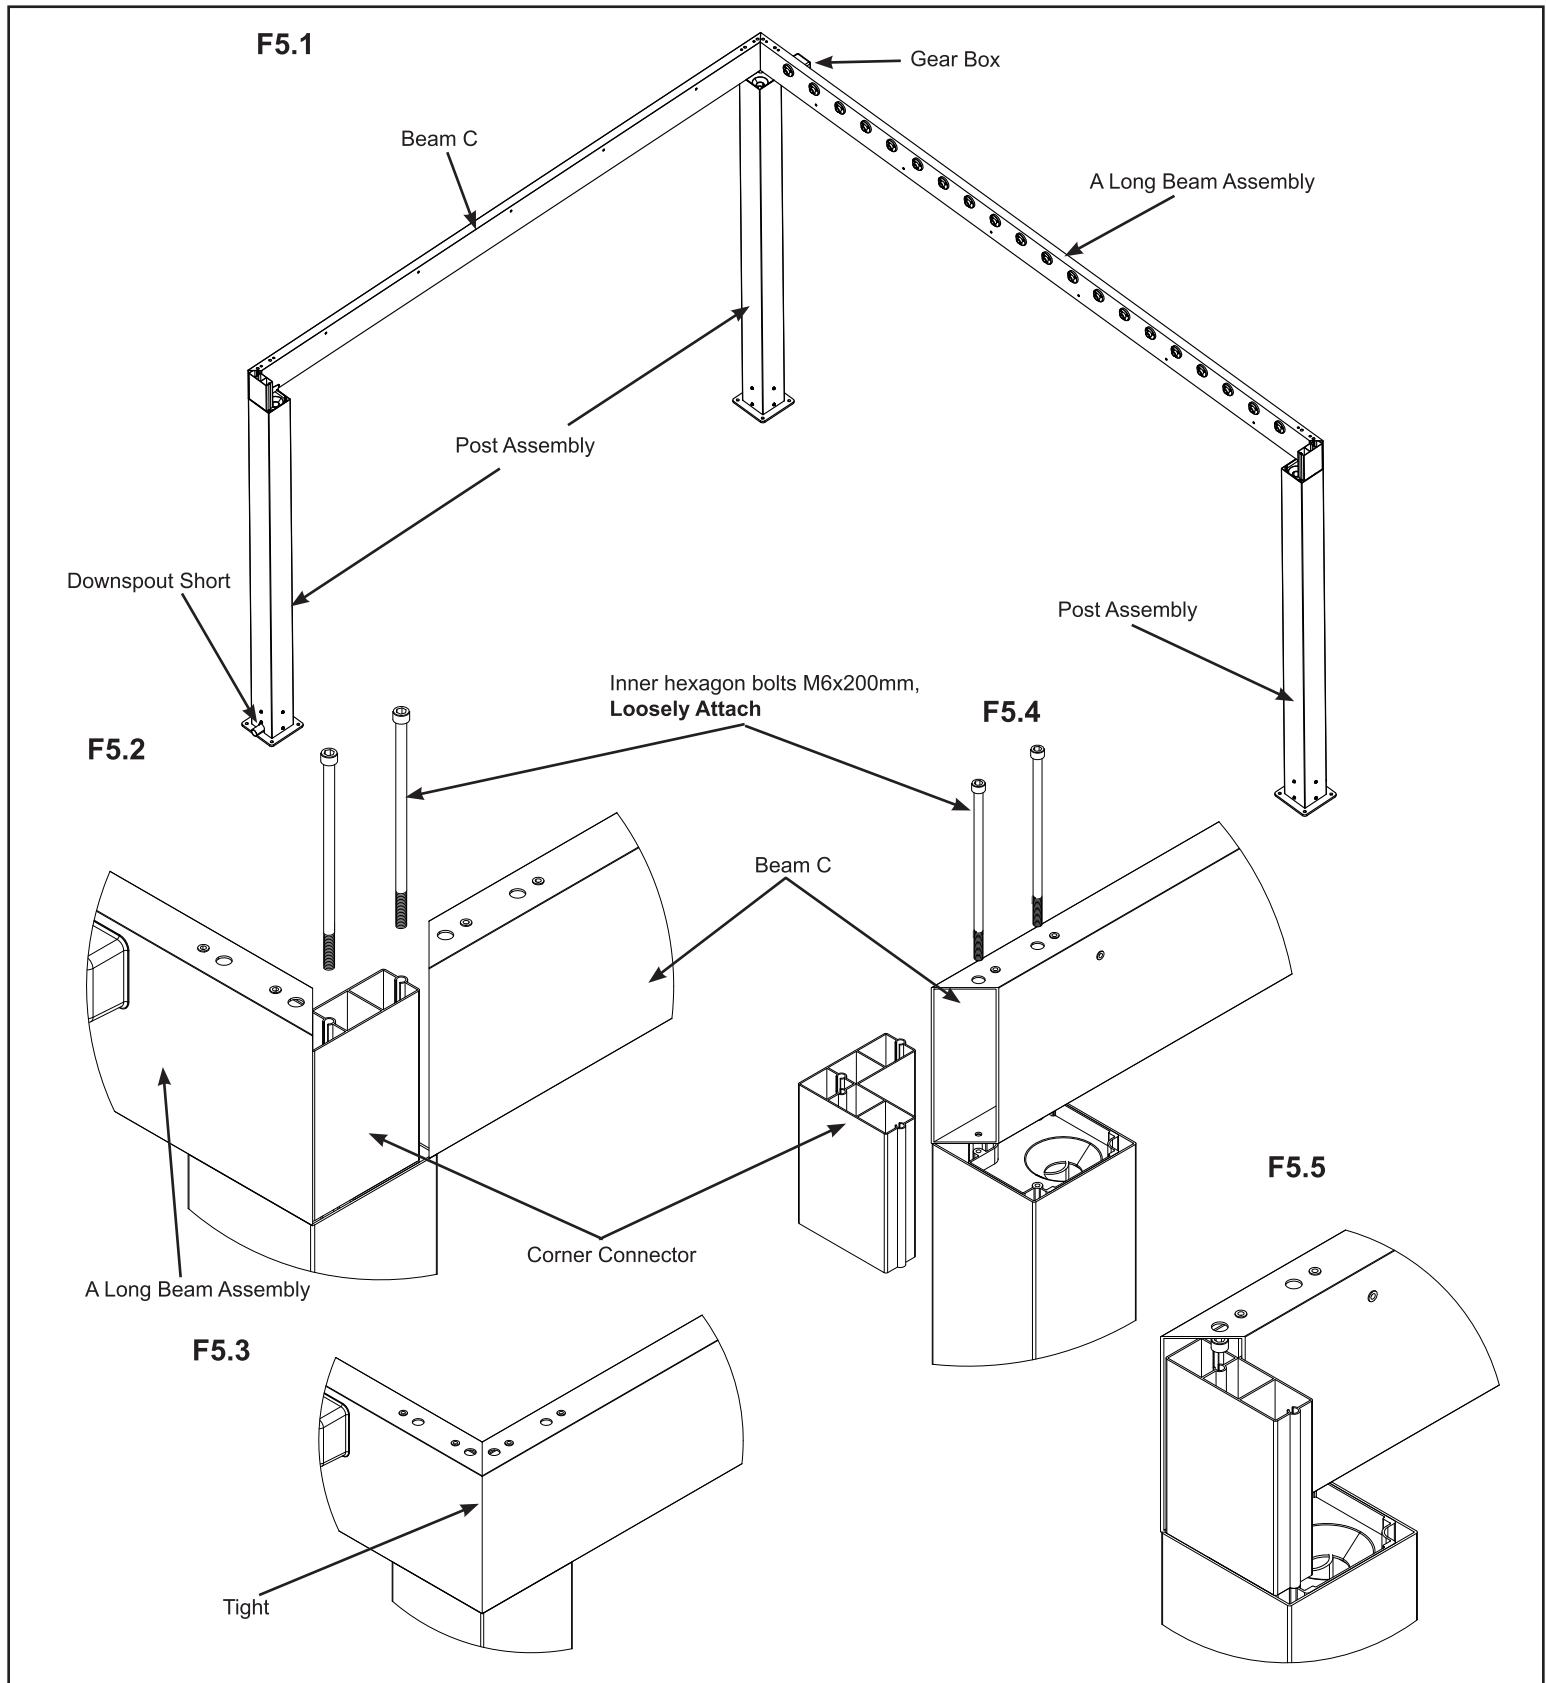


Components

1 x Beam C
1 x Corner Connector

Hardware

4 x Inner hexagon bolts M6x200mm

Step 6: B Long Beam Assembly Installation

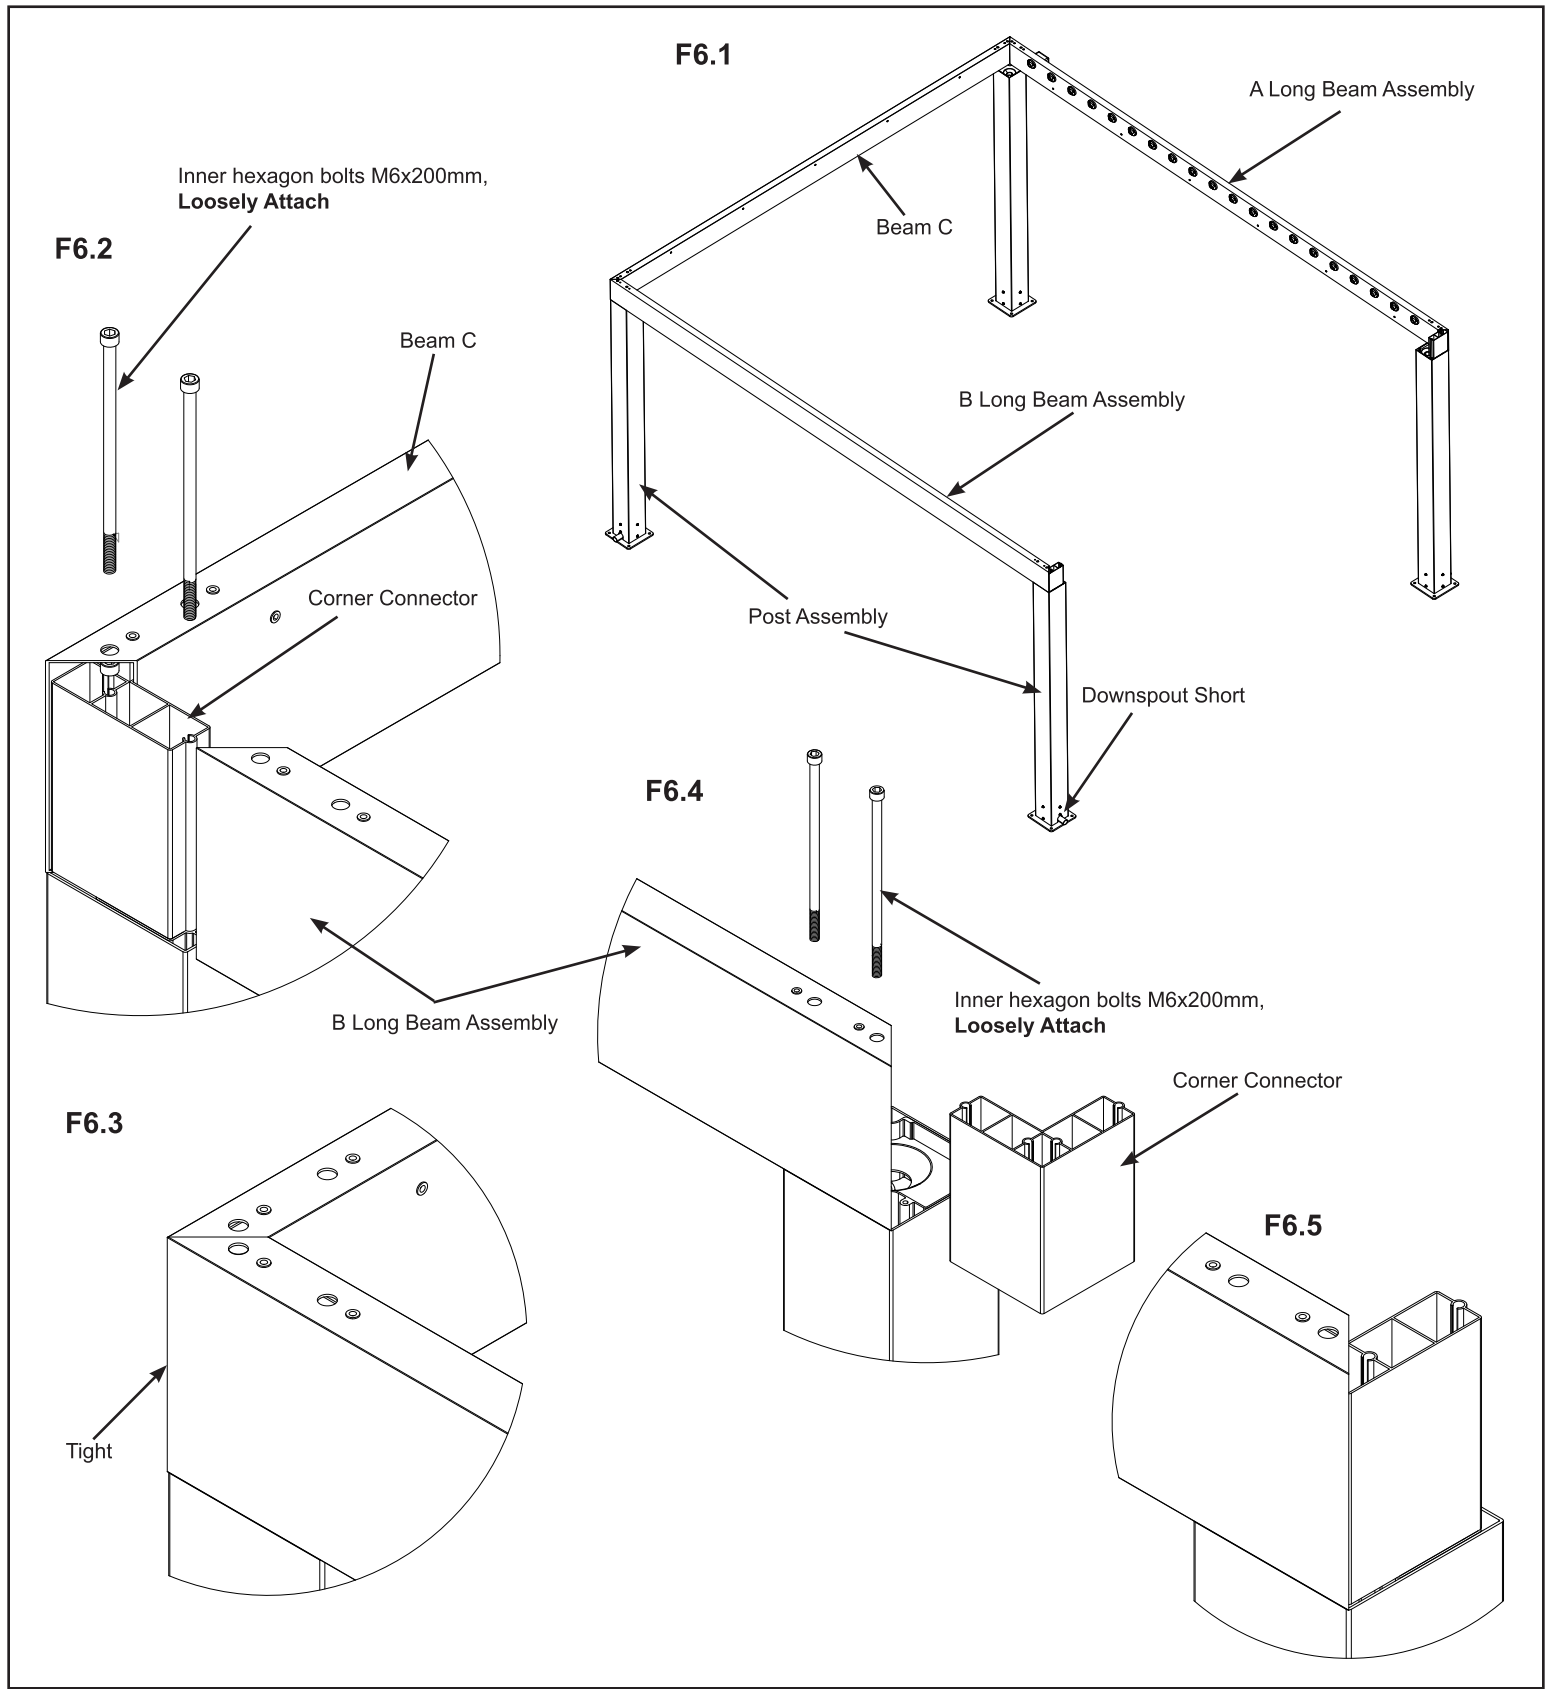

Components

1 x B Long beam assembly
1 x Corner Connector


Hardware

4 x Inner hexagon bolts M6x200mm


Step 7: Beam D Installation




F7.1

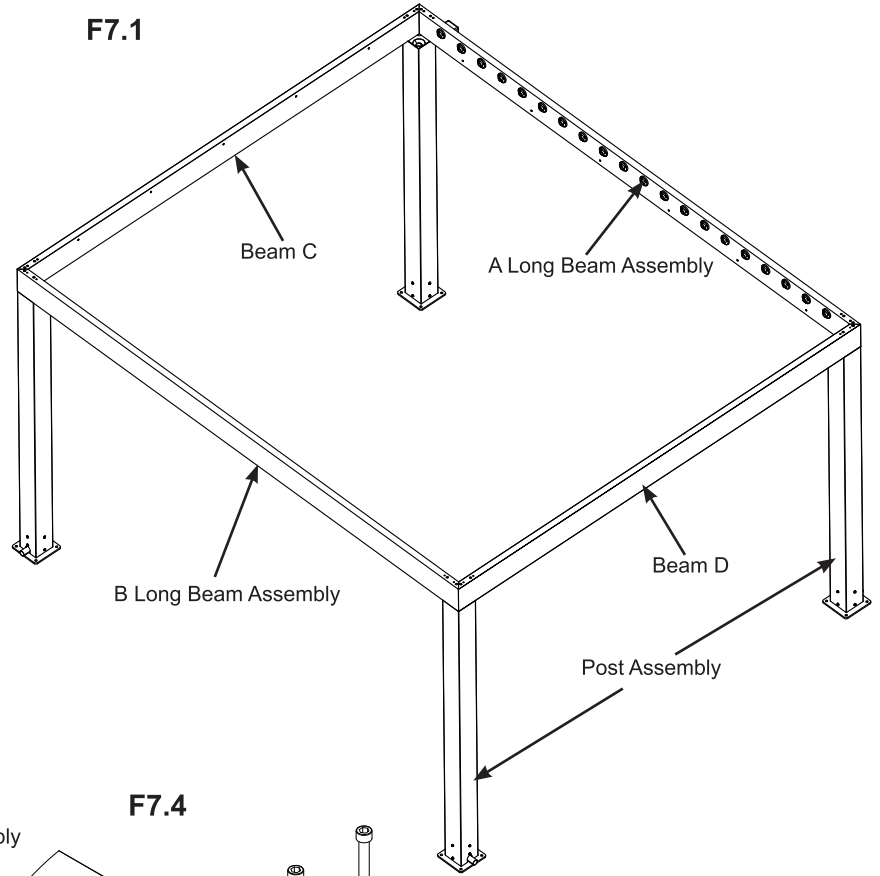


F7.2

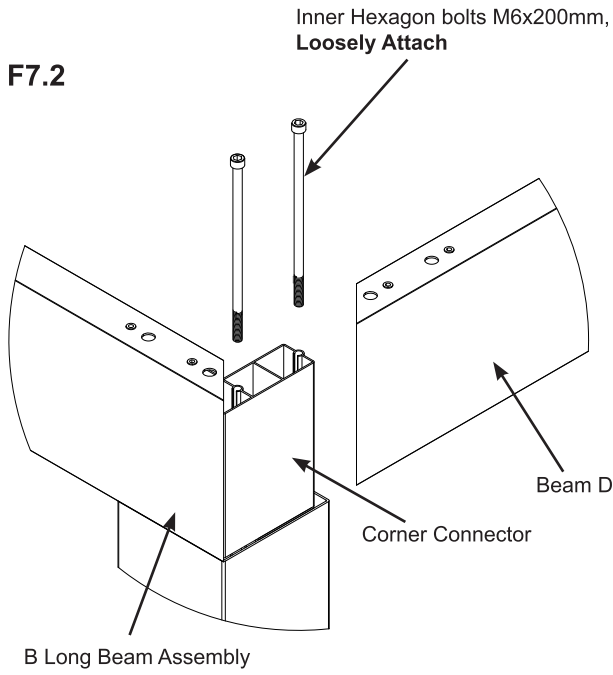


F7.4

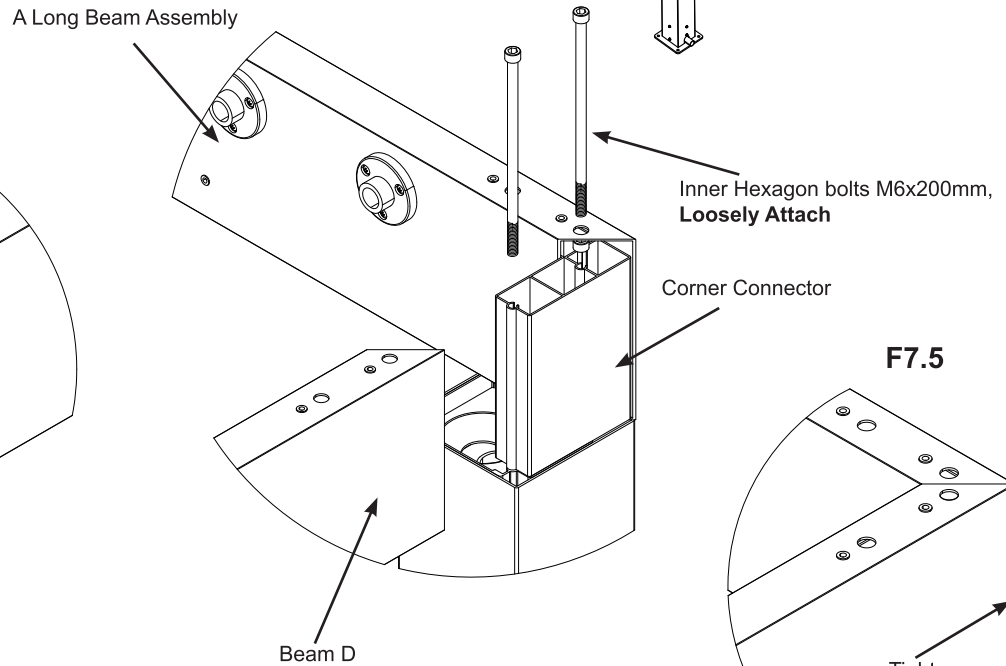

F7.3

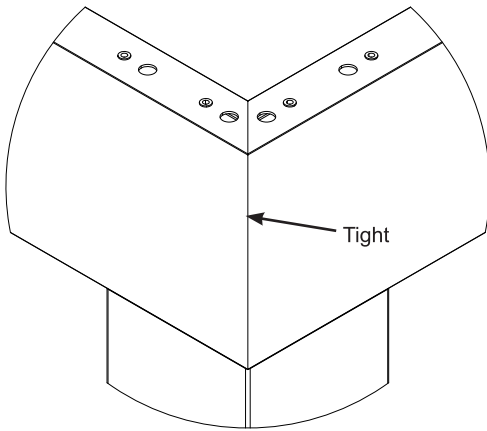

F7.5

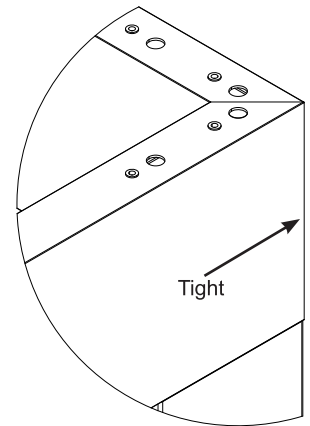

Components
1 x Beam D

Hardware
4 x Inner hexagon bolts M6x200mm


Step 8: Check Frame Dimensions




Check the dimensions of the frame according to the figure below, after checking, tighten all Bolts. (F8.1)

Note: When the installation size and location are determined, anchor hardware can be purchased to anchor the Aluminum Louver Room.

F8.1

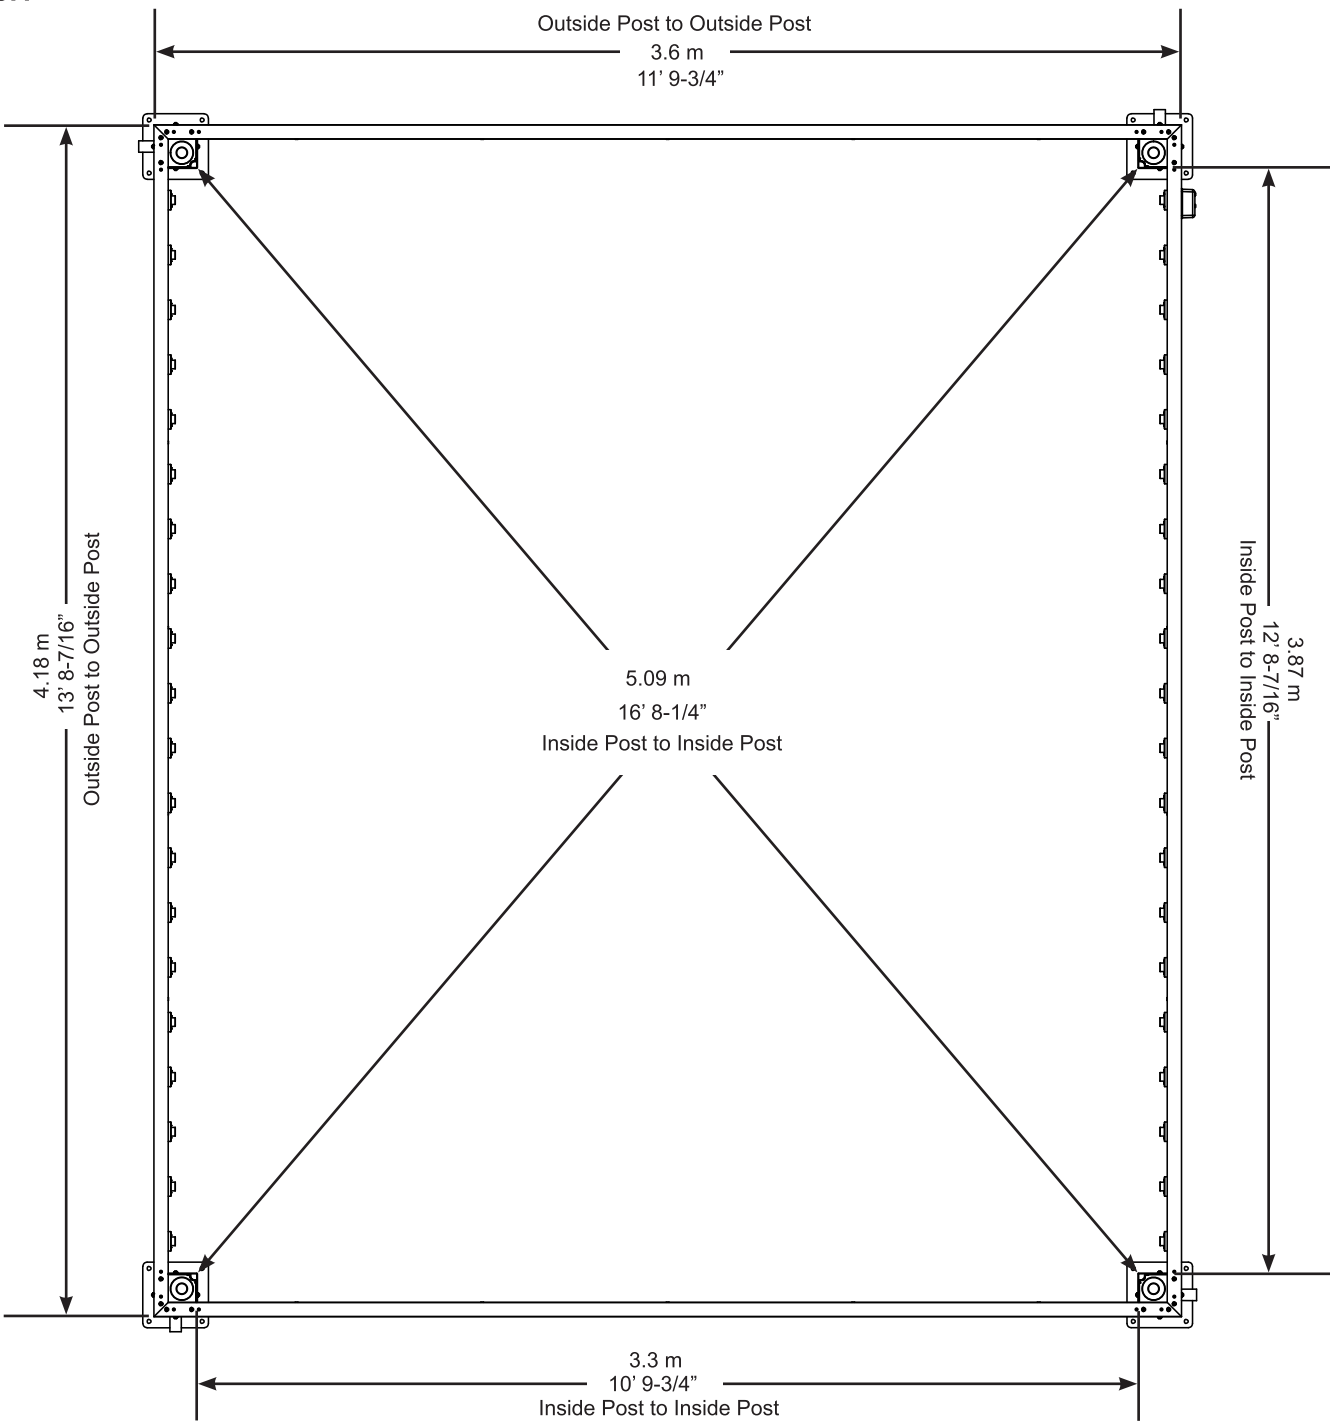

Step 9: A Louver Assembly/Long Louver End Plate

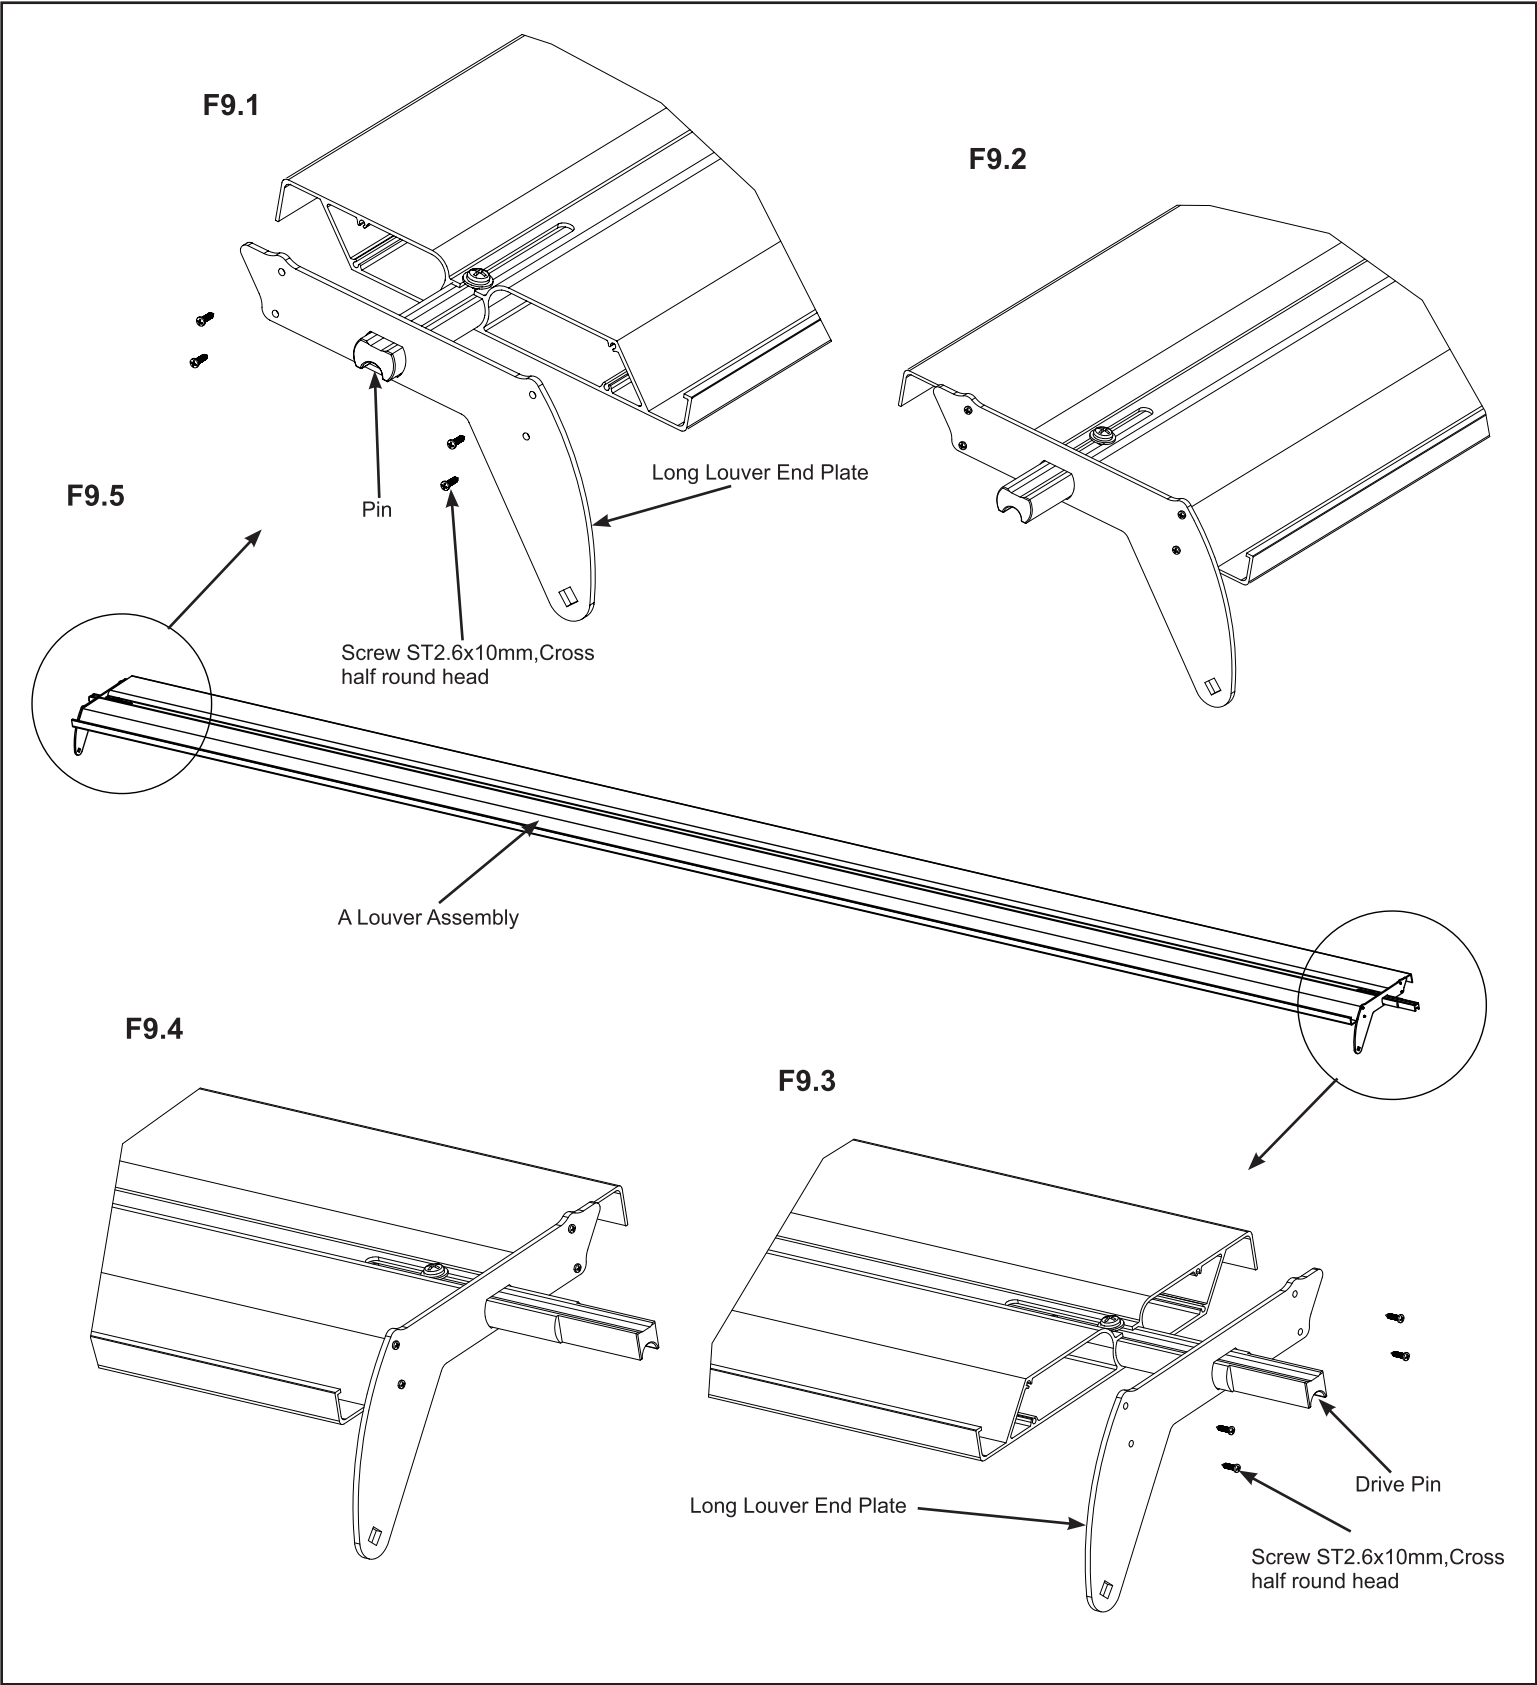


Components

- 1 x A Louver Assembly
- 2 x Long Louver End Plate

Hardware

- 8 x Screw ST2.6x10mm,Cross half round head

Step 10: B Louver Assembly/Long Louver End Plate

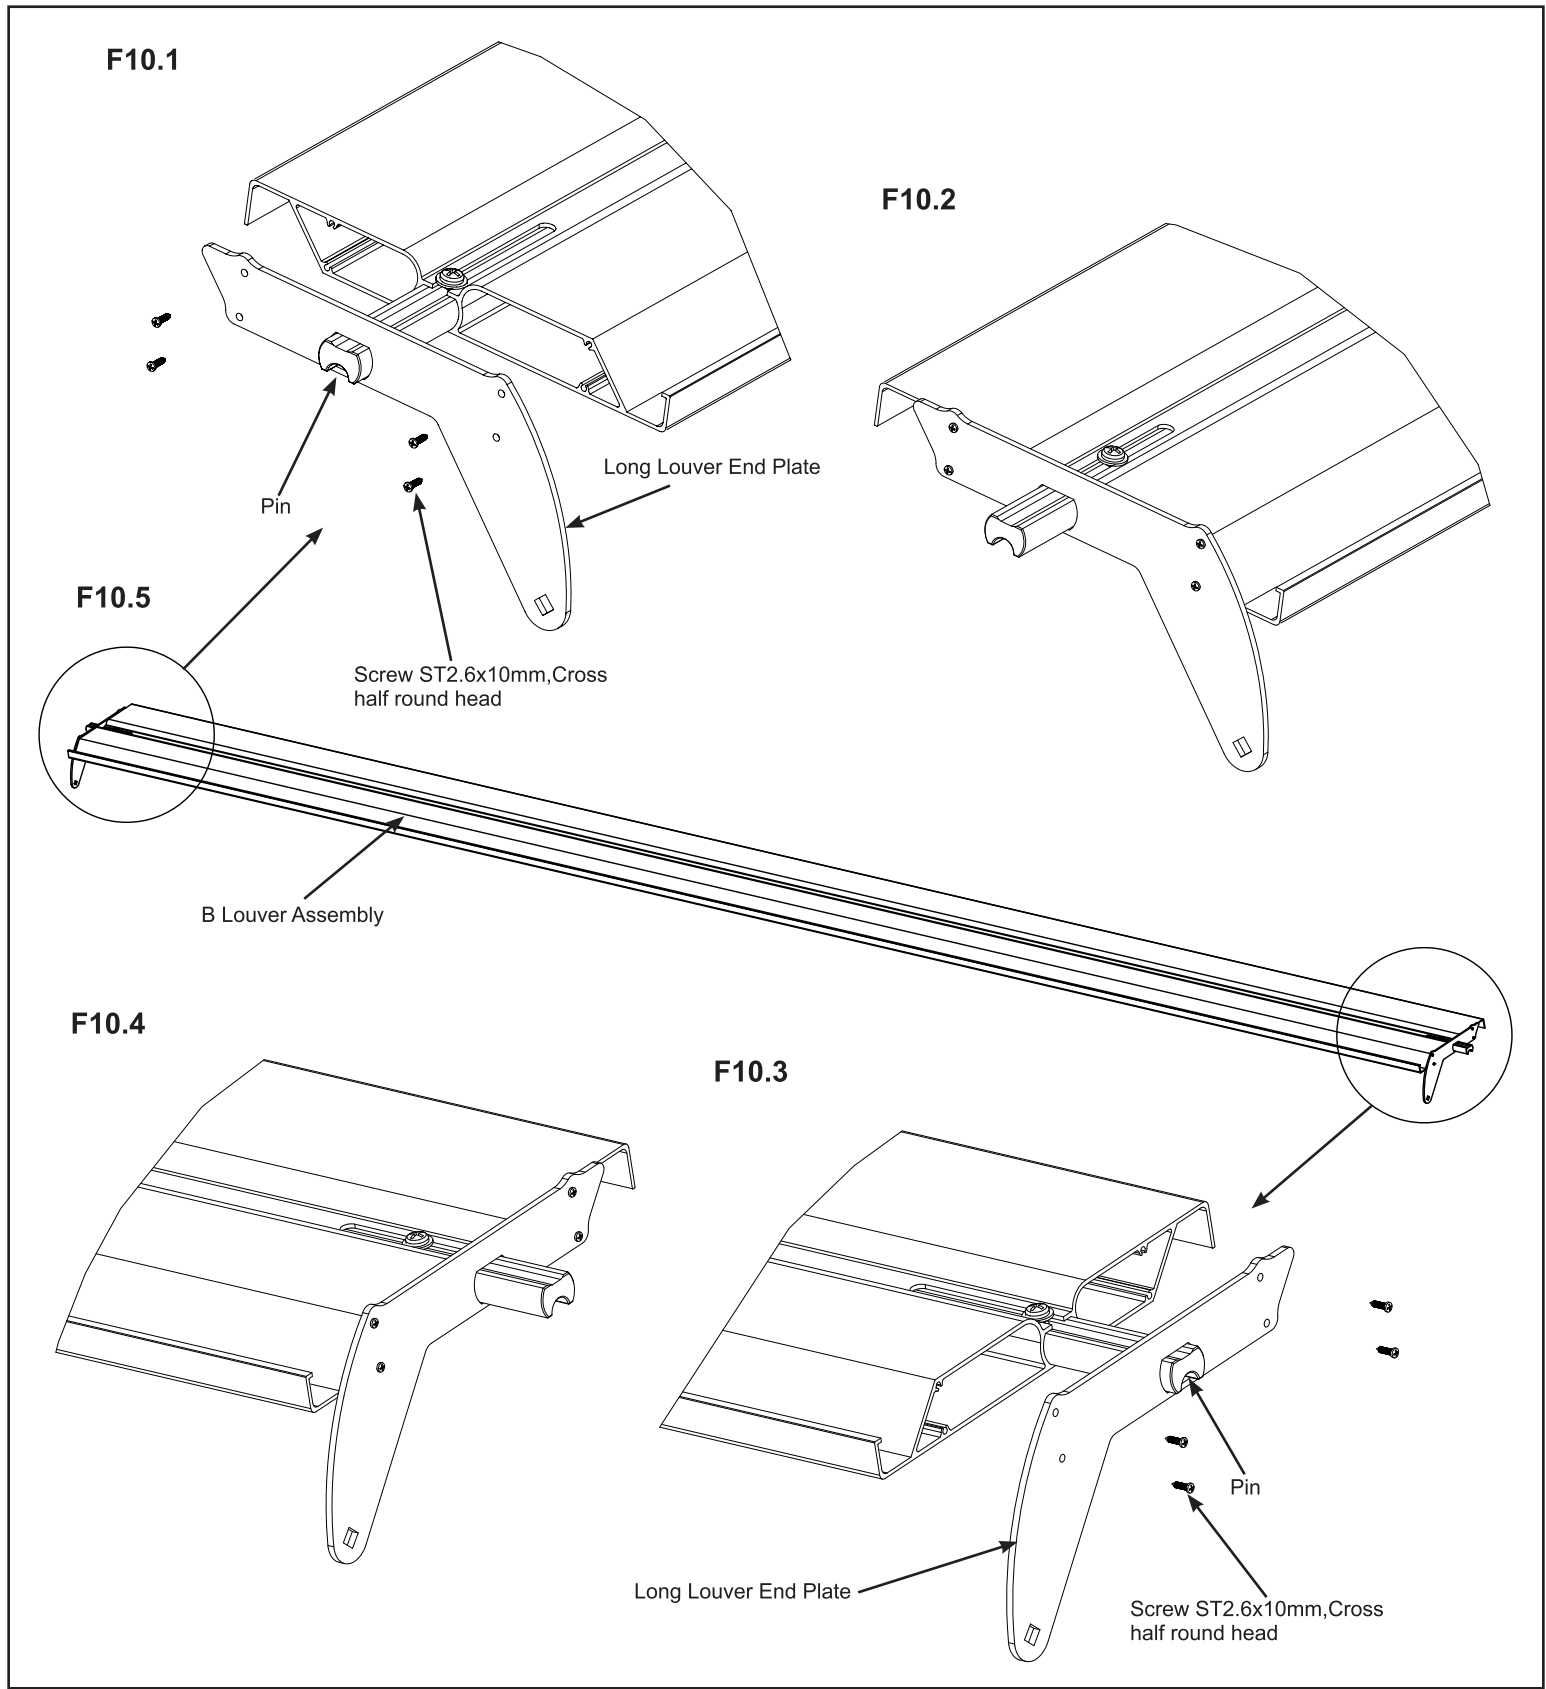



Components:

19 x B Louver Assembly
38 x Long Louver End Plate

Hardware

152 x Screw ST2.6x10mm, Cross half round head

Step 11: Front Gutter installation

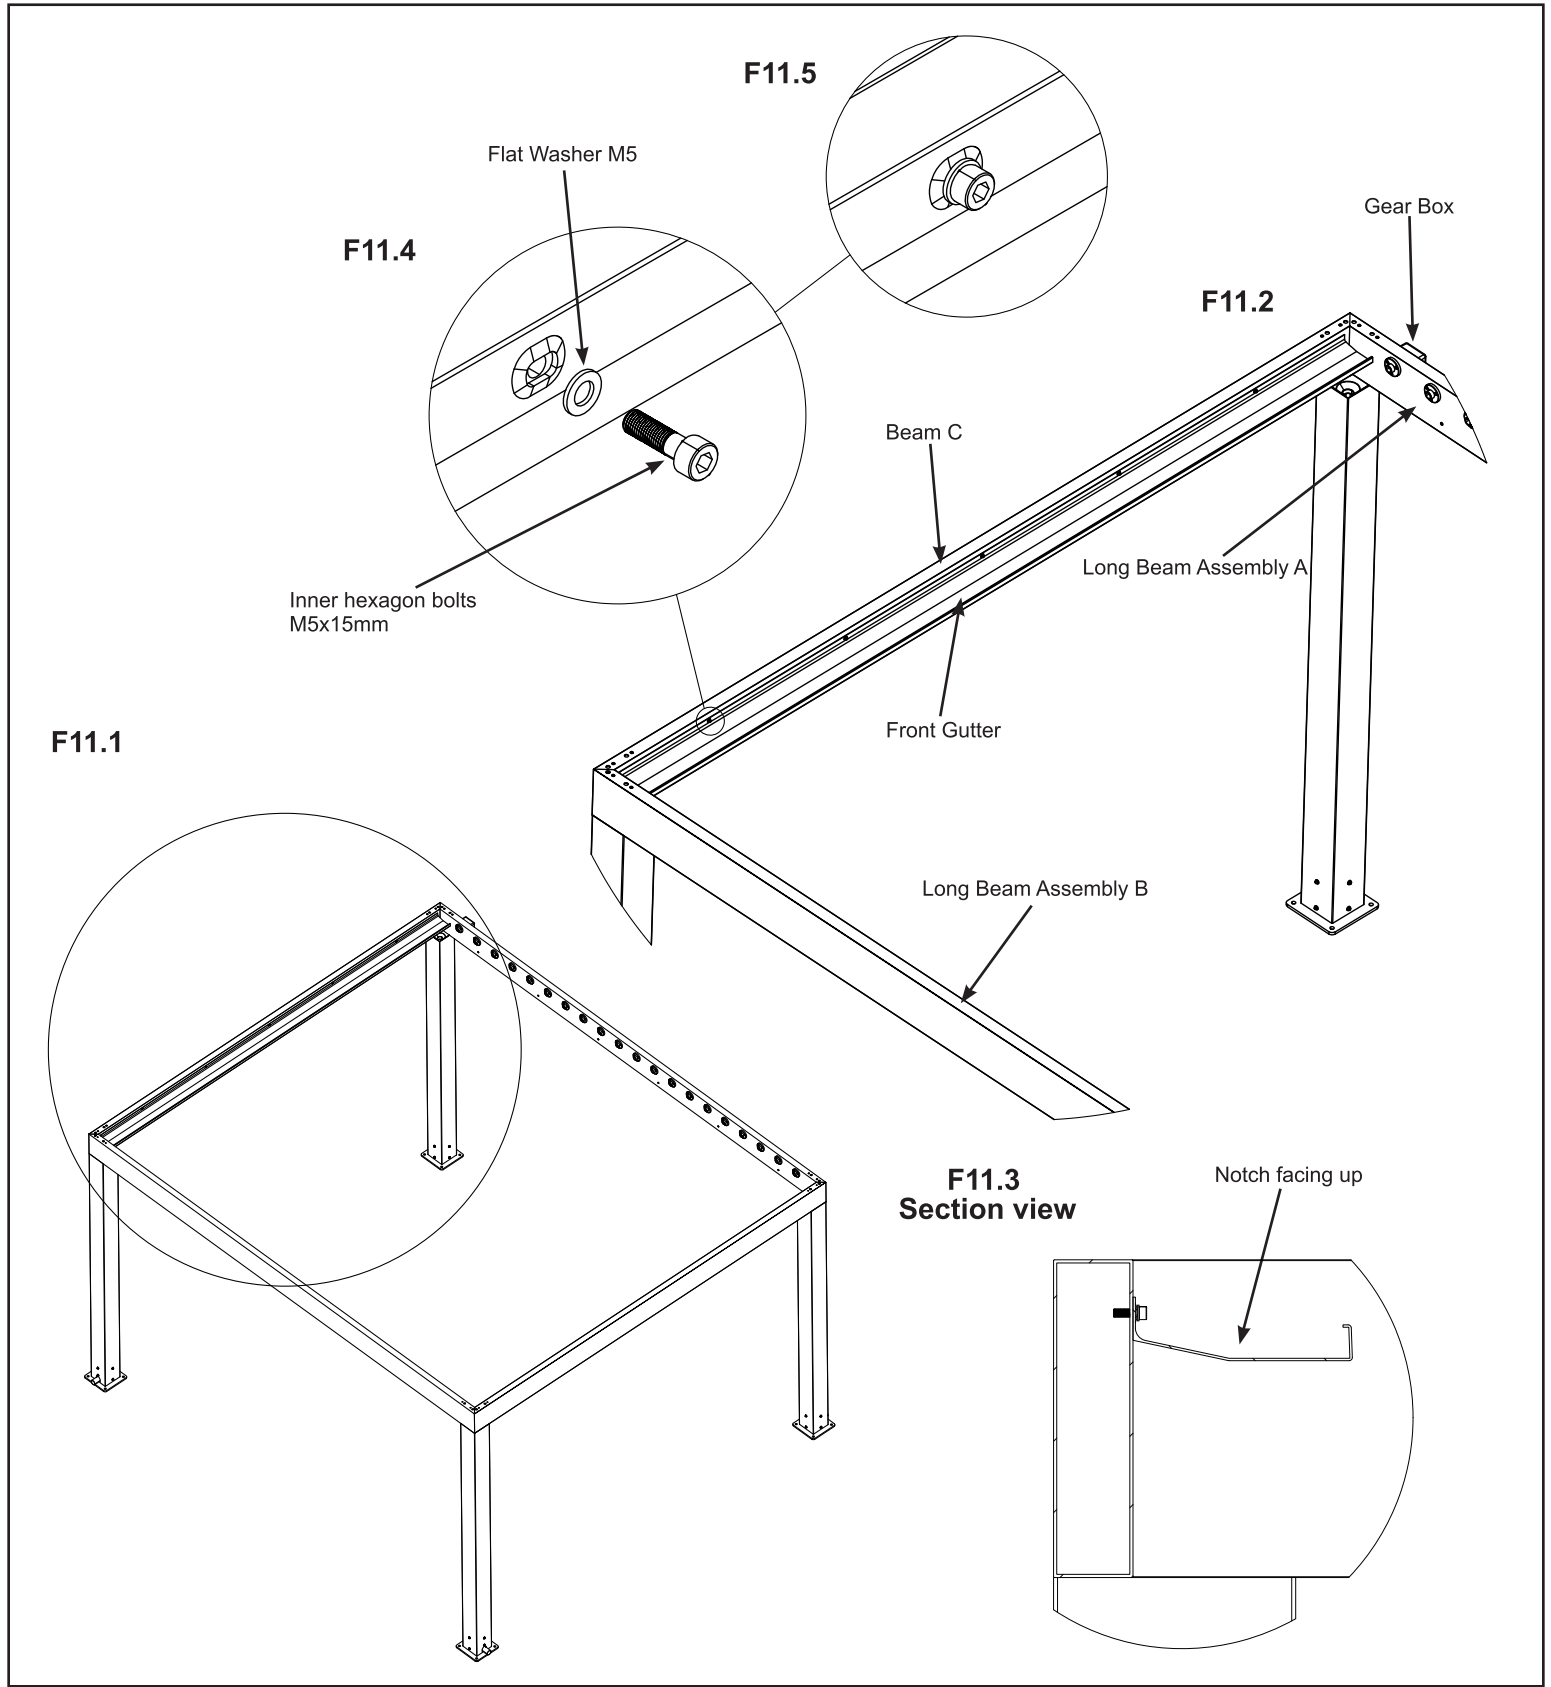


Components:

1 x Front Gutter


Hardware

5 x Inner hexagon bolts M5x15mm
5 x Flat Washer M5

Step 12: Back Gutter installation



F12.2
Inside view

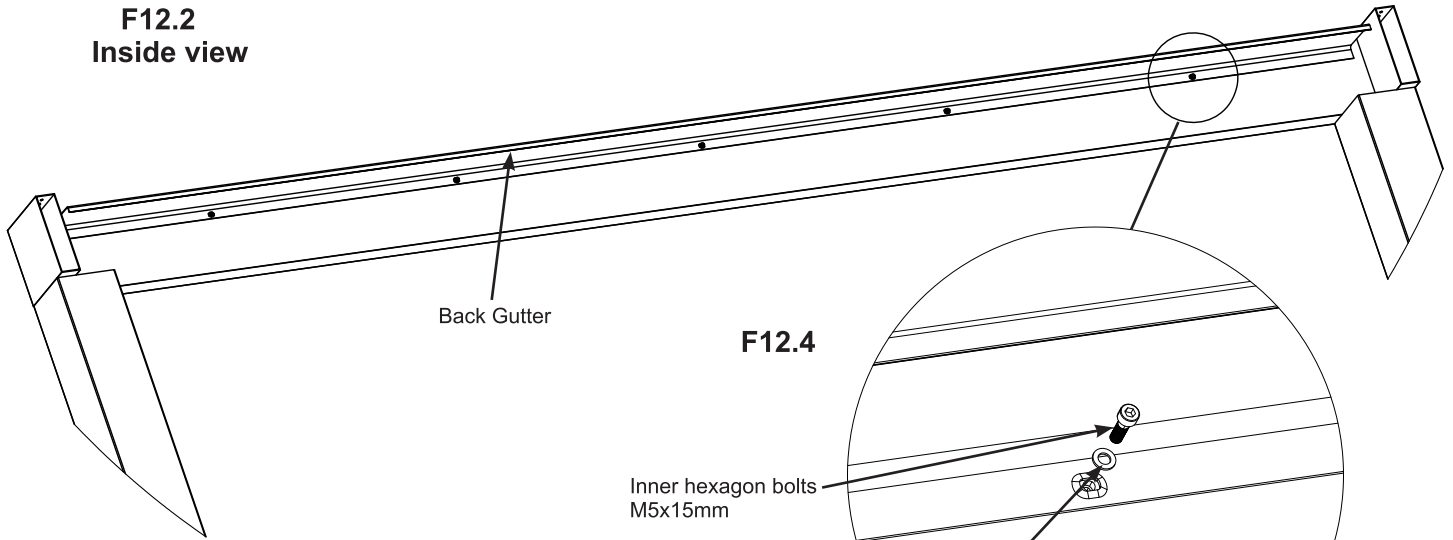


F12.4


Inner hexagon bolts
M5x15mm

Flat Washer M5


F12.1

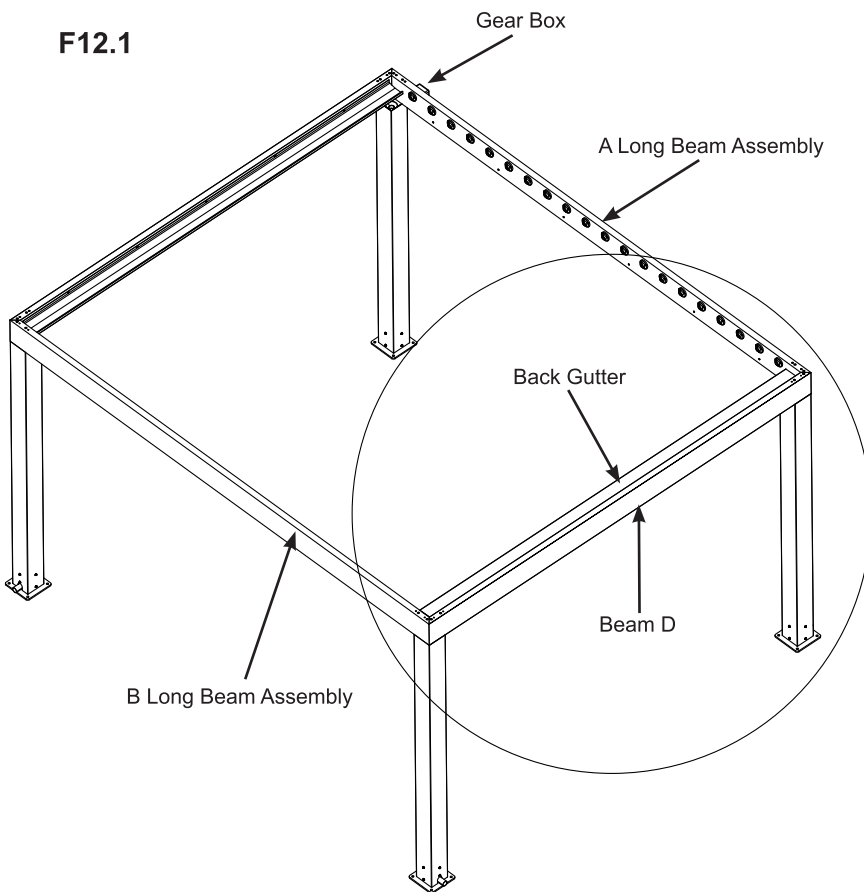

F12.5

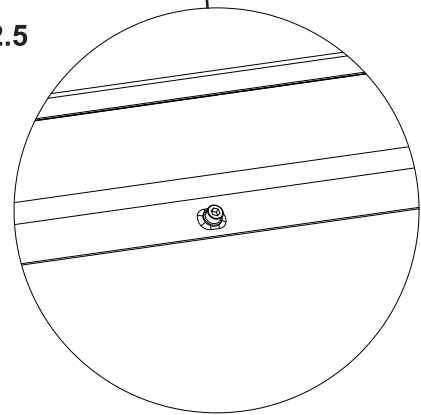

F12.3
Side view

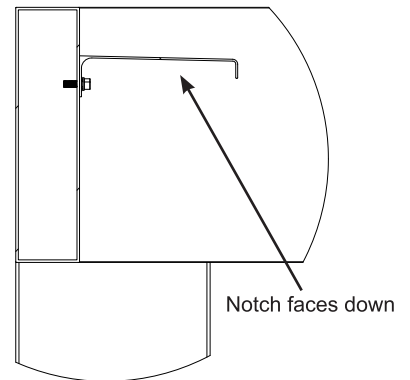



Components:

1 x Back Gutter

Hardware

5 x Inner hexagon bolts M5x15mm
5 x Flat Washer M5



Step 13: A Louver Assembly installation

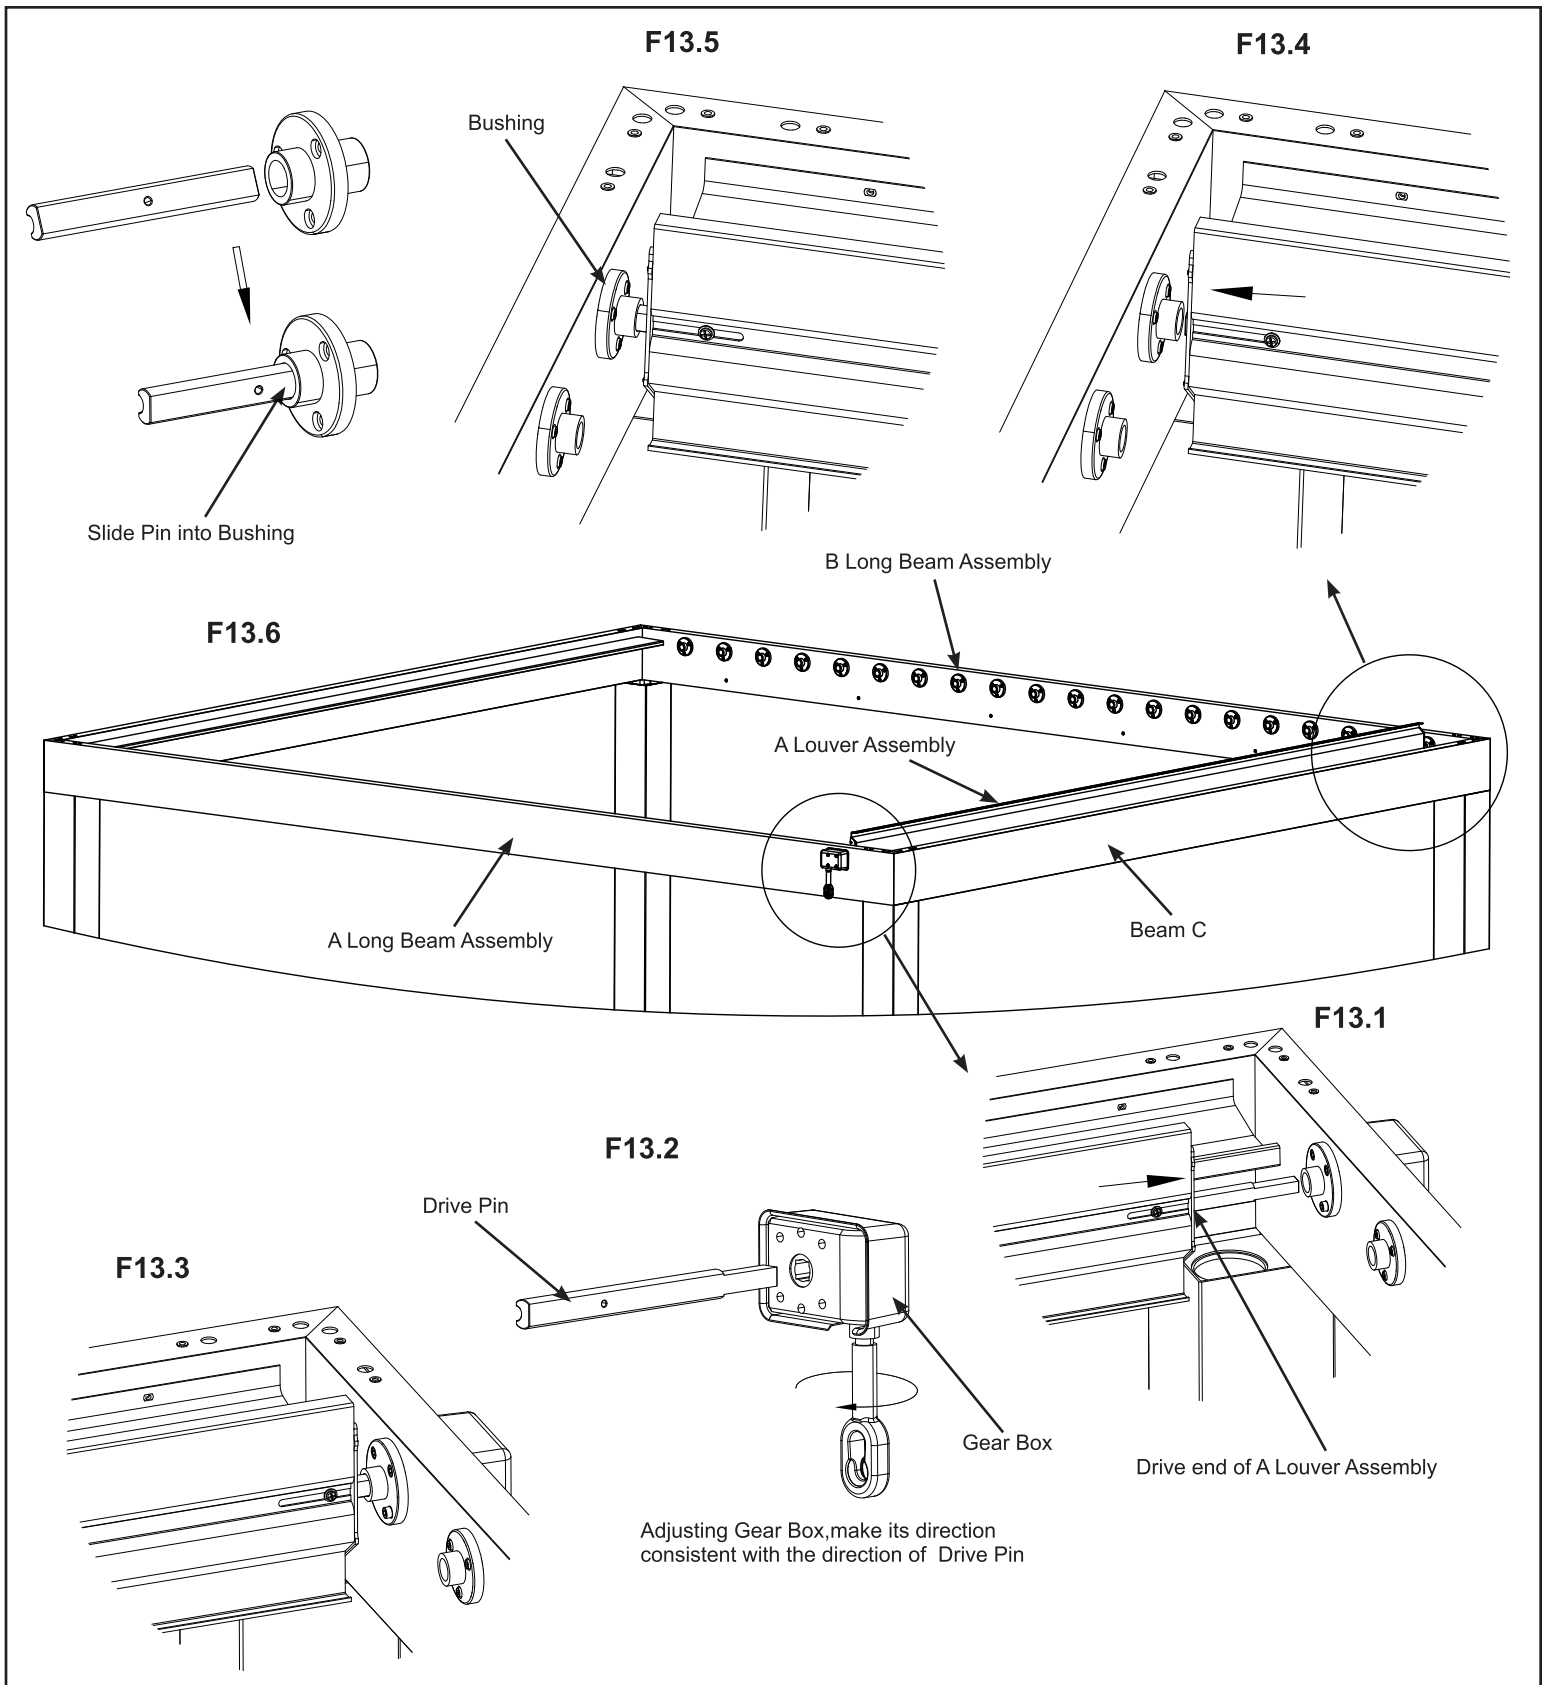

Components:


1 x A Louver Assembly

Step 14: B Louver Assembly installation

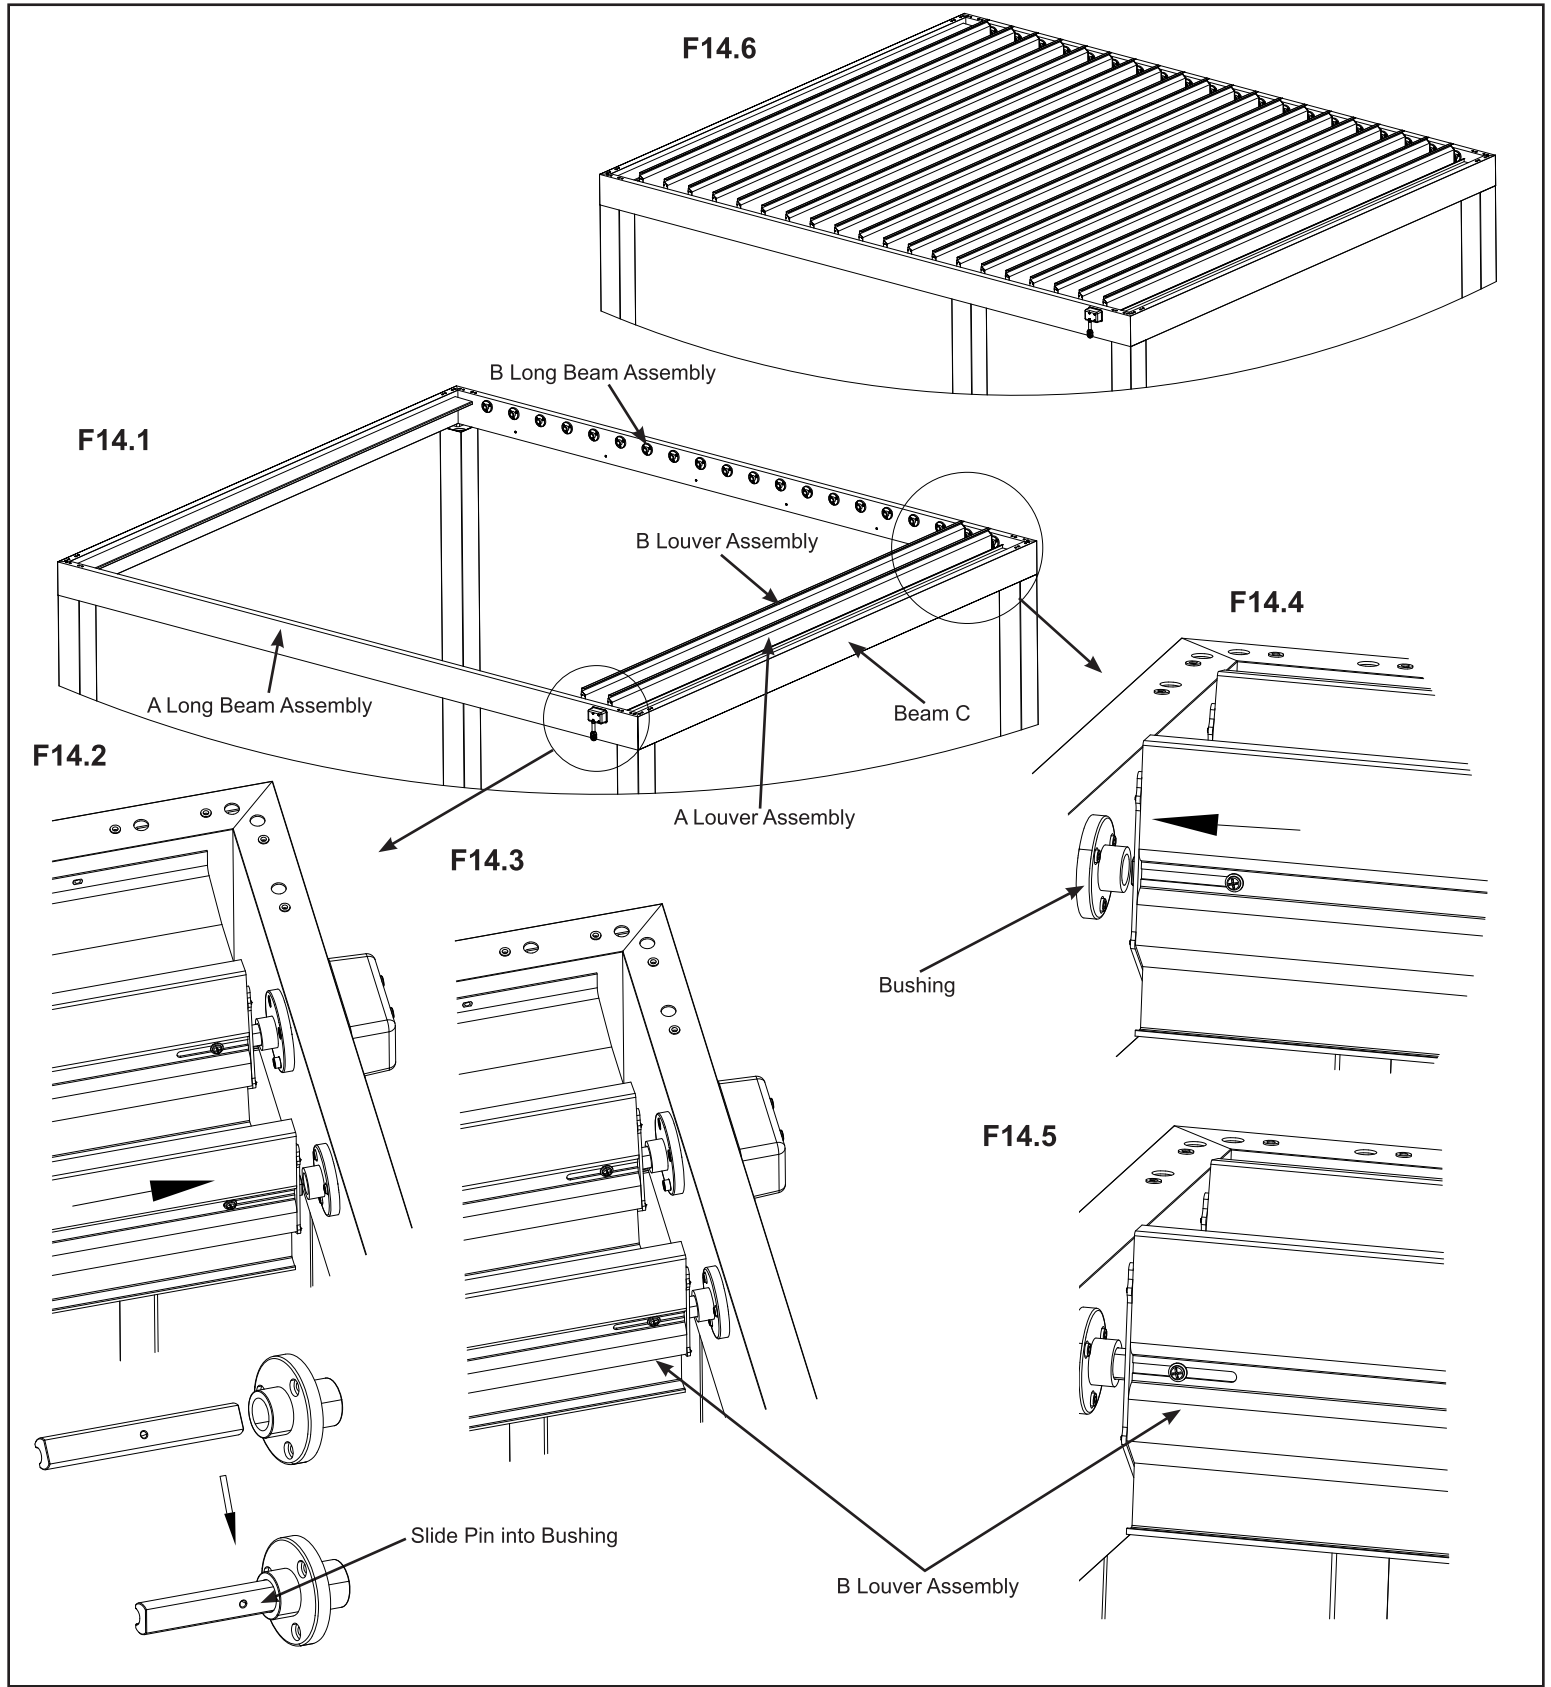



Components:

19 x B Louver Assembly



Step 15: Long Louver Link installation

Long Louver Links are installed on both sides of Louver Assembly, Carriage Bolts pass from inside out through Long Louver End Plate and Long Louver Link. (F15.1)

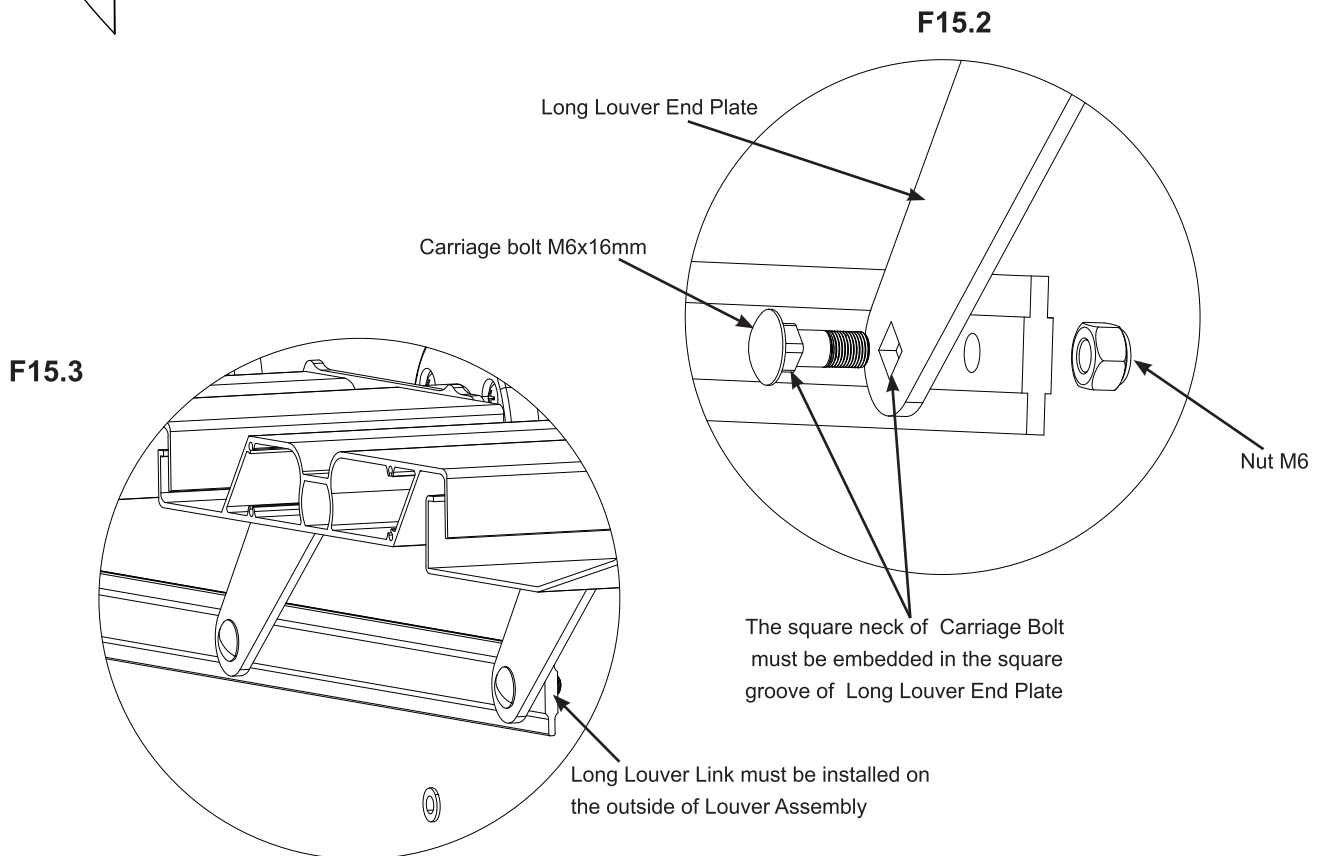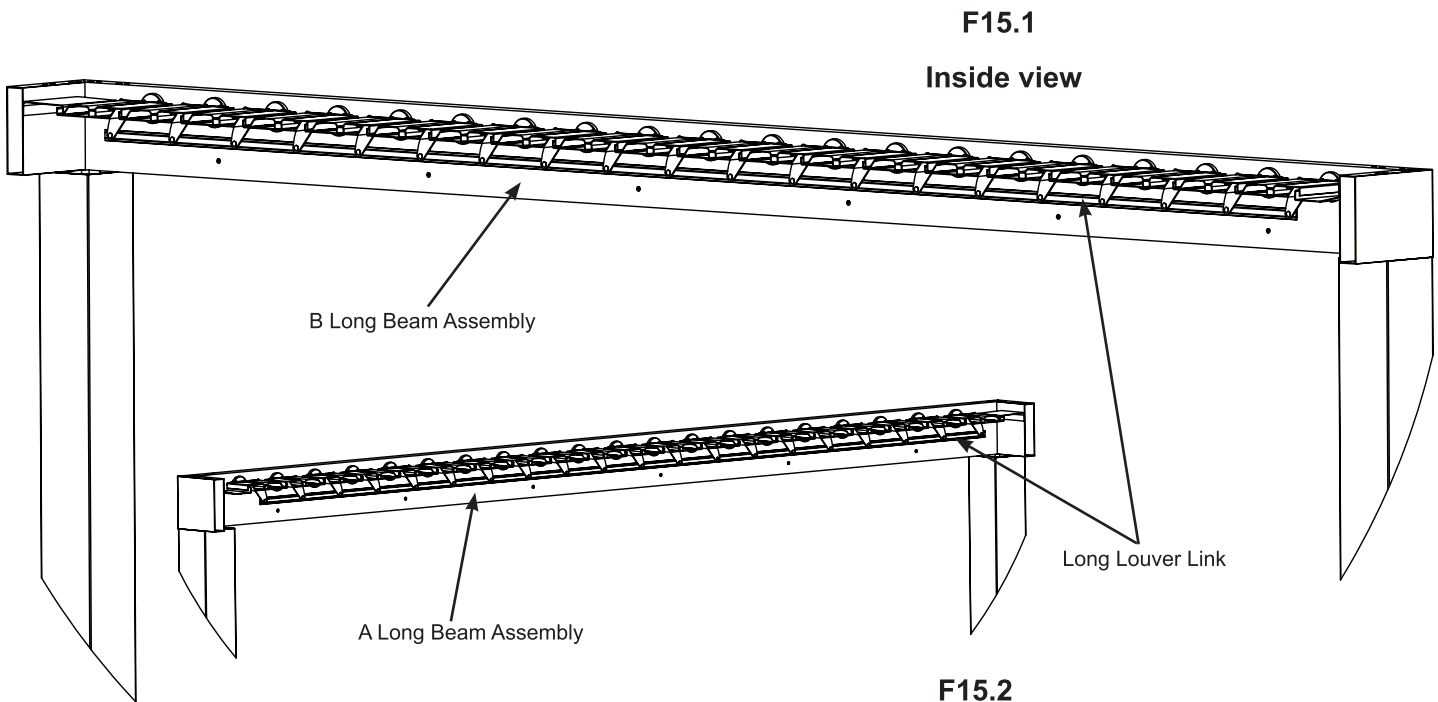


Components:

2 x Long Louver Link

Hardware


40 x Carriage bolt M6x16mm
40 x Nut M6

Step 16: Adjust the position of Louver Assembly




Position all Louver Assemblies so that they are centered, and then tighten Bolts.(F16.1, F16.2, F16.3)

F16.1

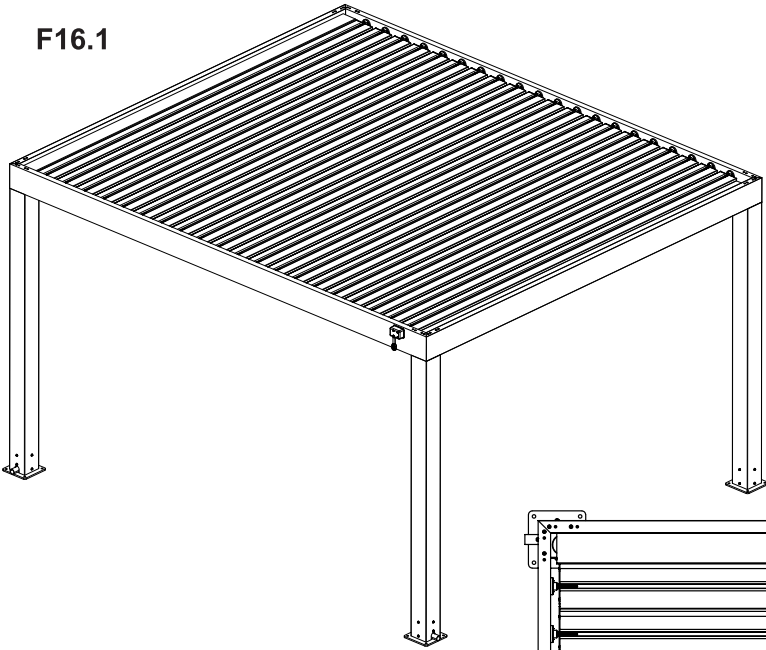


F16.2

All Louver Assemblies
Center position

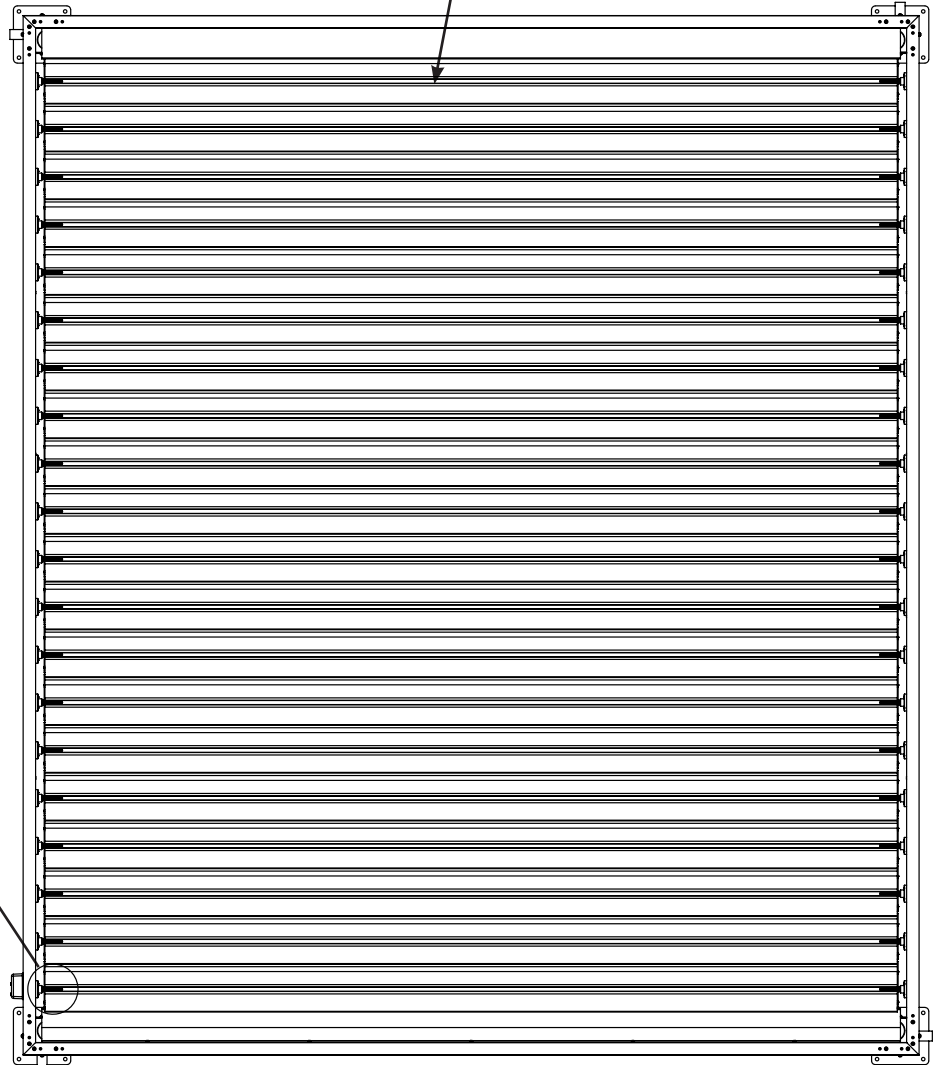

F16.3

Tighten all bolts

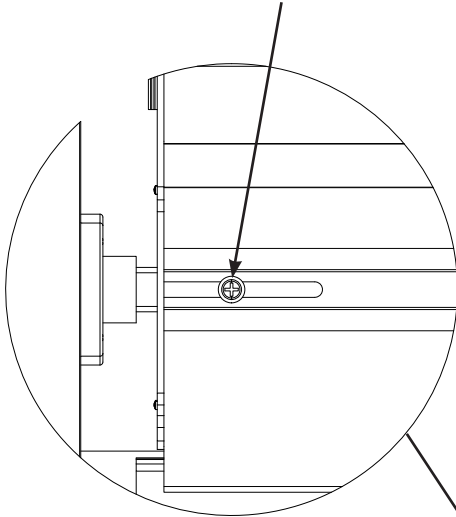

Step 17: Side Gutter Assembly installation




Side Gutter Assemblies are placed on Post Assembly and tight to A Long Beam Assembly and B Long Beam Assembly. (F17.1, F17.2, F17.3, F17.4)


F17.1

Louvers Removed for Clarity

F17.4

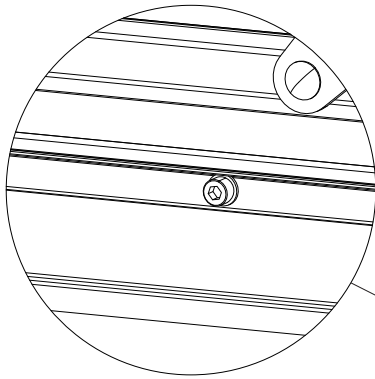


F17.3

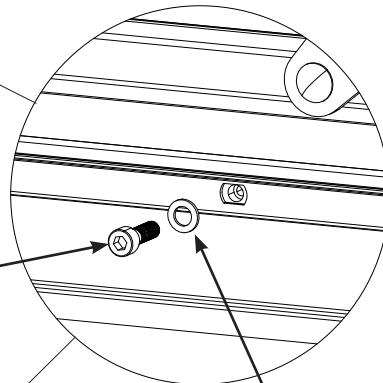

Inner hexagon bolts
M5x15mm

Flat Washer M5

F17.2
Inside view

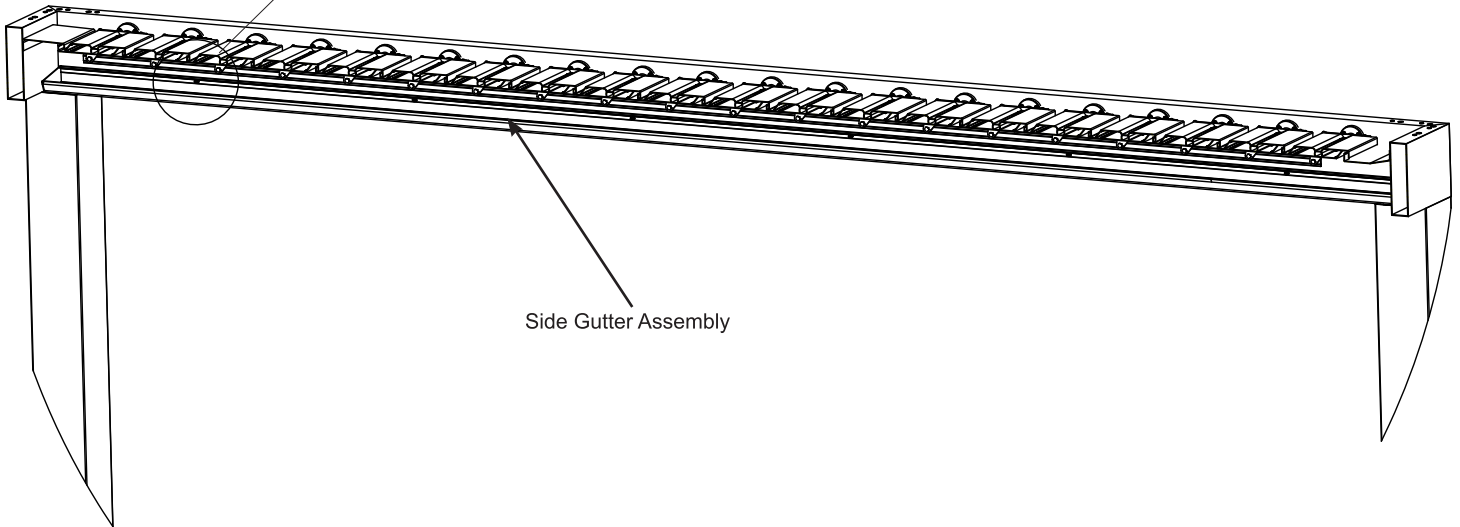

Side Gutter Assembly

Components:

2 x Side Gutter Assembly

Hardware

12 x Inner hexagon bolts M5x15mm
12 x Flat Washer M5




Step 18: Triangle Plate installation


A: Four Triangle Plates need to be installed at the four positions where long beam and beam are connected. (F18.1)

B: Four Triangle Plates need to be installed with 16pc Inner Hexagon Bolts M5x15mm and 16pc Flat Washer M5, and the reserved mounting holes are plugged with 16pc Plastic Caps. (F18.2 and 18.3)


F18.2

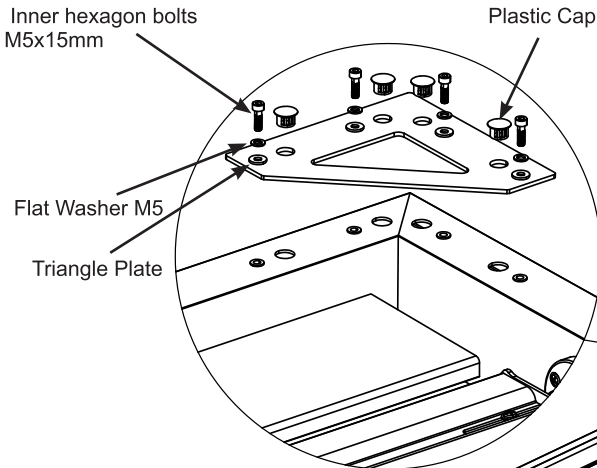

F18.3



F18.1

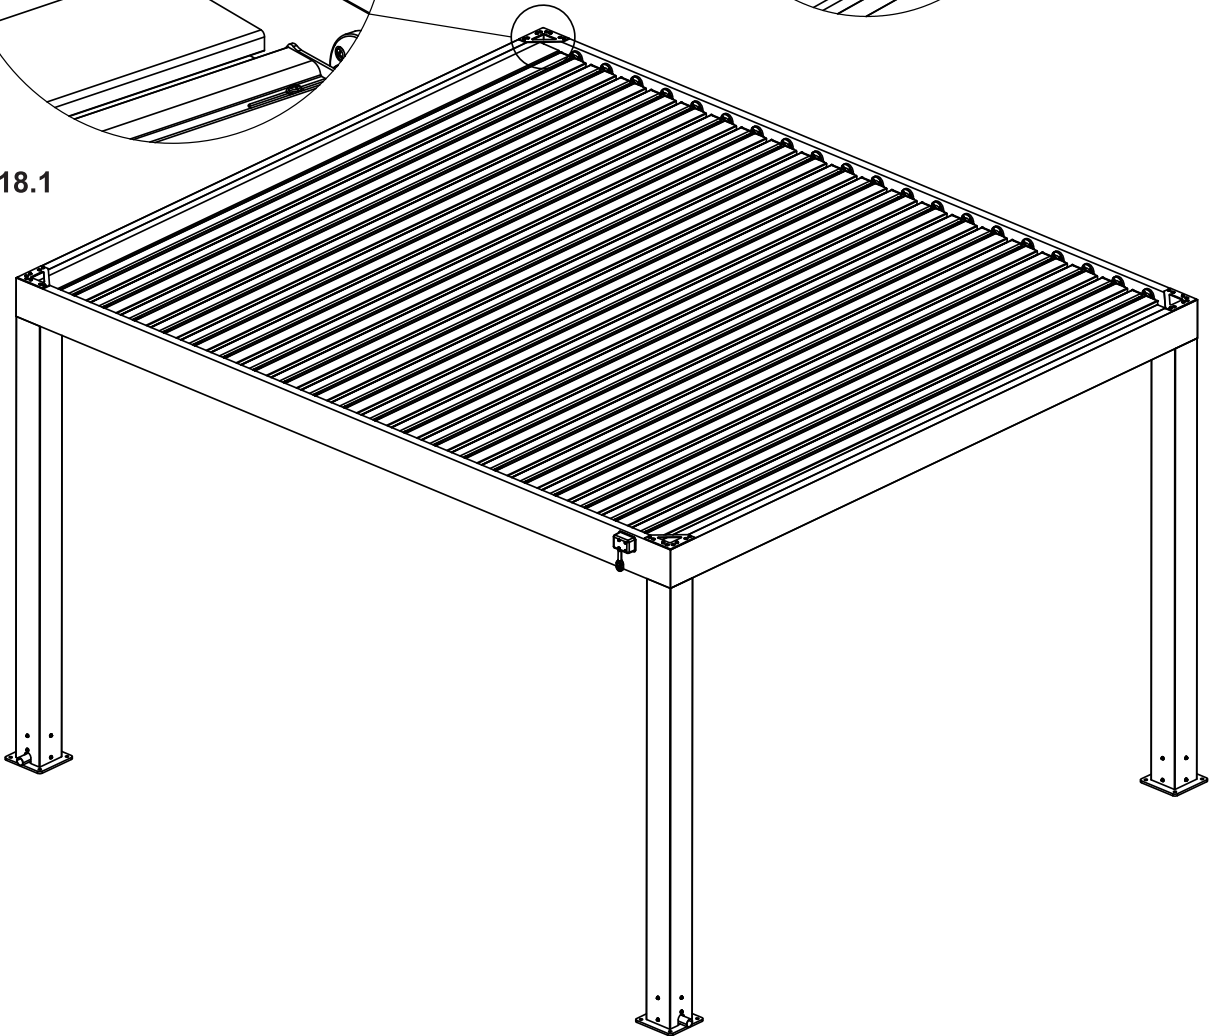

Components:

4 x Triangle Plate

Hardware

16 x Inner hexagon bolts M5x15mm

16 x Flat Washer M5


16 x Plastic Cap



Step 19: Attach ID Plaque

Attach Gazebo ID Plaque to a prominent location on your gazebo, this provides warnings concerning safety and important contact information. (F19.1)

F19.1

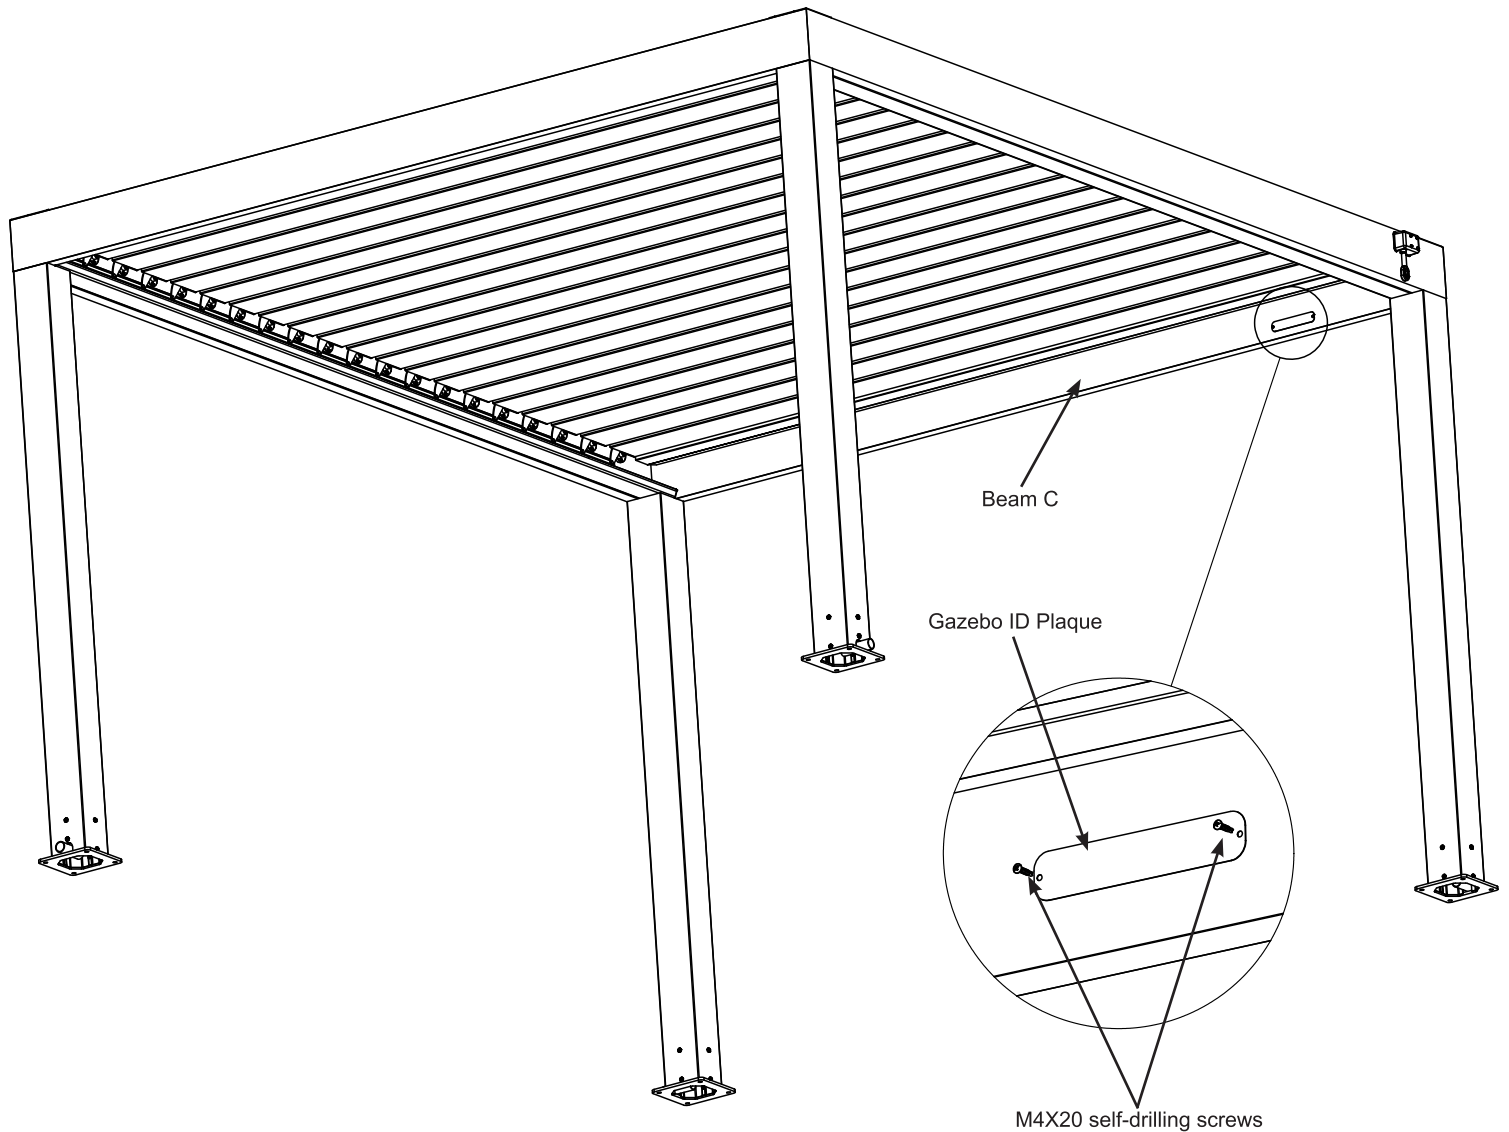

Components:

1 x Gazebo ID Plaque

Hardware

2 x M4X20 self-drilling screws




Step 20: Gear Box Lockout and Winter Maintenance

IMPORTANT!

When preparing for high winds and/or winter conditions, turn the louvers to the open position (upright) then attach the Lock Out and Quick Link. This will prevent the structure from blowing over due to high winds and the louvers from breaking due to snow and ice loads. (F20.1)

F20.1

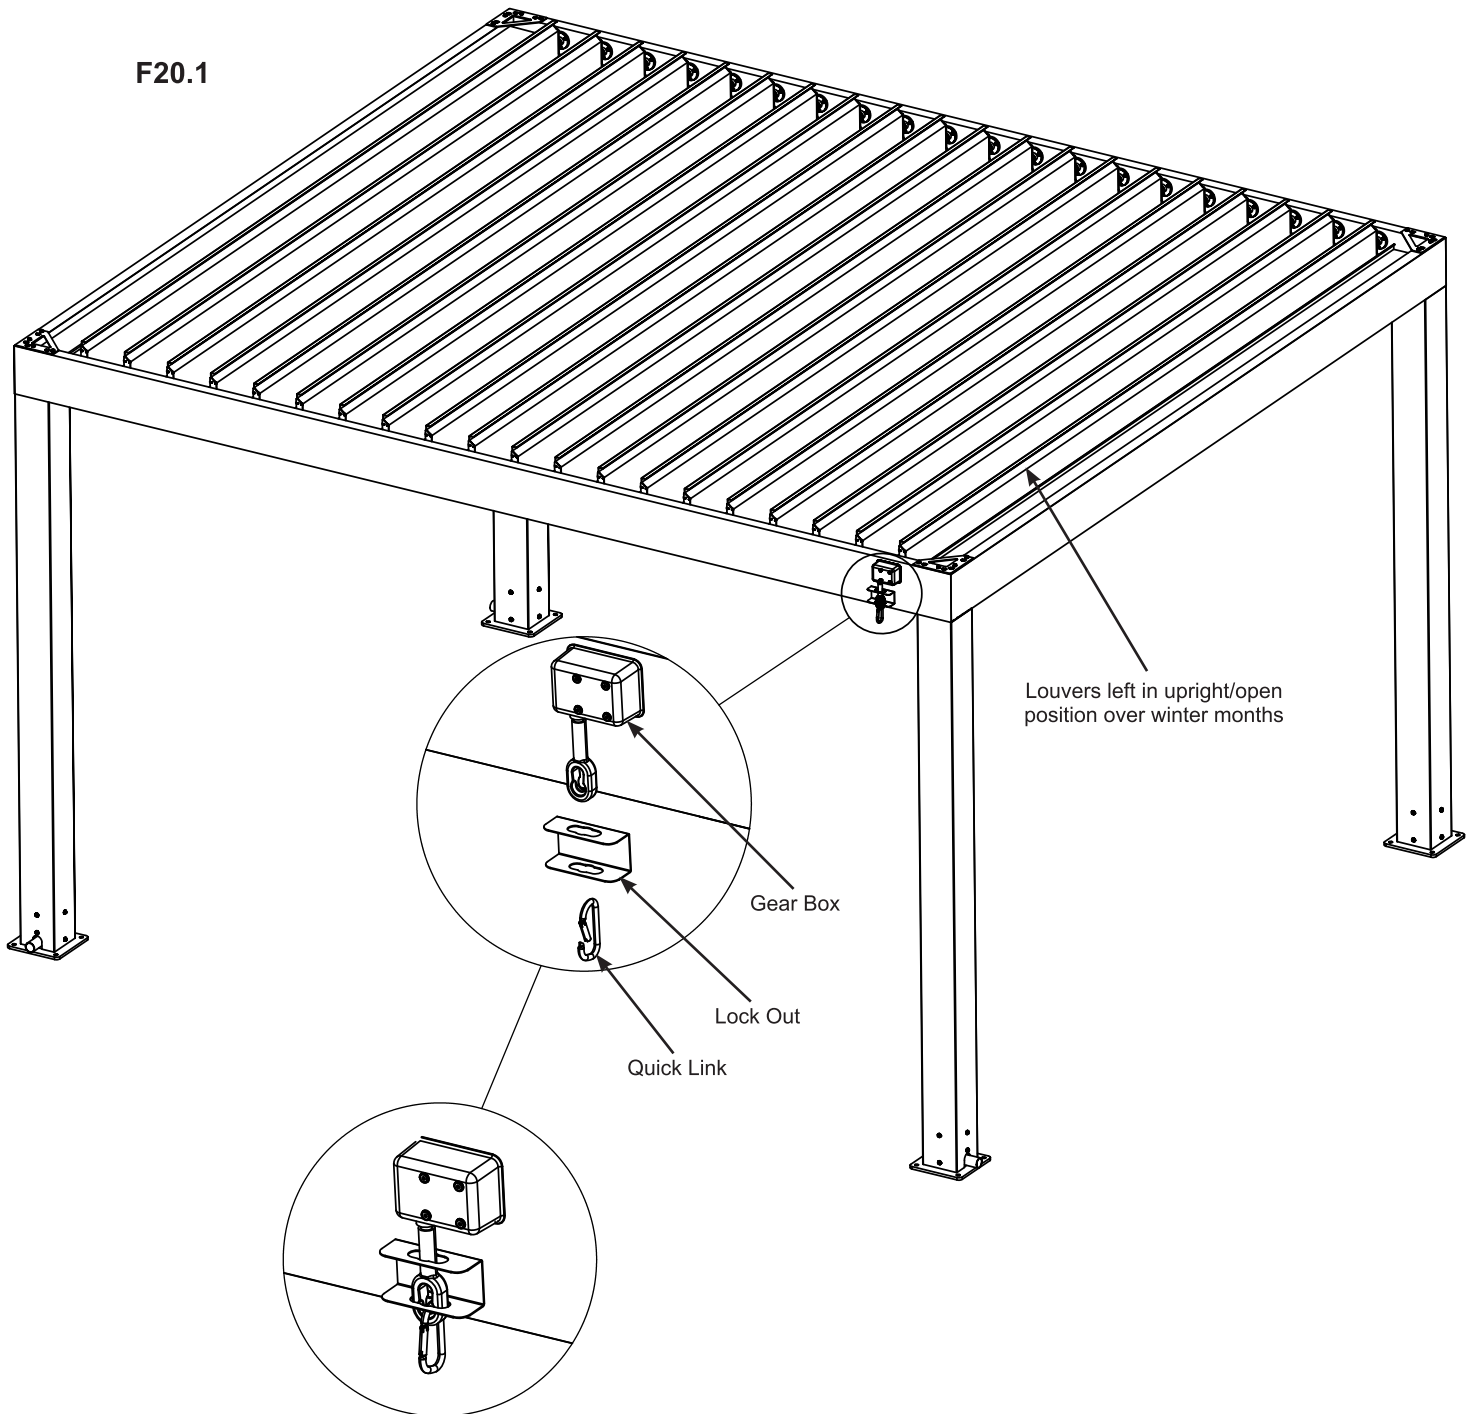

Components:

- 1 x Lock Out
- 1 x Quick Link

[illegible]



Customer Registration Card - Carte d'inscription du client - Tarjeta de Registro del Cliente

First Name - Prénom - Primer Nombre	Initial - Initiale - Inicial	Last Name - Nom de famille - Apellido

Street - Rue - Calle	PO Box - Boîte postale - Casilla postal	Apt. No. - App.

City - Ville - Ciudad	State/Province - État/Province - Estado/Provincia

ZIP/Postal Code - ZIP/Code postal - Código Postal	Country - Pays - País

E-mail Address - Adresse courriel - Dirección de E-mail	Telephone Number - N° de téléphone - No. de Teléfono

Model Name - Nom du modèle - Nombre del Modelo	Model Number (from front cover) - N° du modèle (page de couverture) - Número de Modelo (de la portada)

Date of Purchase - Date d'achat - Fecha de Compra (mm/dd/yyyy) (mm/jj/aaaa) (mm/dd/aaaa)	Place of Purchase - Lieu d'achat - Comprado a

Comments - Commentaires - Comentarios :

Mail To - Envoyer par courrier à - Enviar por Correo a:

Yardistry
375 Sligo Road West, PO Box 10
Mount Forest, Ontario, Canada, N0G 2L0
Attention: Consumer Relations
À l'attention de : Service à la clientèle
Atención a: Servicio de Atención al Cliente

Online Registration - Enregistrement en ligne - Registro online:

www.yardistrystructures.com/warranty

1.888.509.4382

Hours/ Heures/ Horas: 8:30 am - 5:00 pm EST
(excl. holidays/ hors jours fériés/ excepto los días festivos)

English and French Spoken / Anglais et français parlés / Inglés y francés hablado

Yardistry would like to say "Thank you" for your time and feedback.

Yardistry aimerait vous remercier d'avoir pris le temps de répondre au sondage.

Yardistry quiere "Agradecerle" por su tiempo y su opinión.